



Rigid Swing Refrigeration Door DB-1

Door description

Refrigerated door specifically designed for the separation of work rooms or refrigerated warehouses. It has a specific design that integrates very well in installations finished with a sandwich panel. It can be 1 or 2 sheets.

It stands out for its excellent quality and finish. It complies with the sanitary standards and the expected benefits for this type of refrigerator doors.

Main Advantages

The door includes a white lacquered extruded aluminum frame and counterframe that allows easy adaptability as well as quick assembly.

The use of high-quality materials and their design are designed so that the door has a minimum level of maintenance.

A refrigeration panel with polyisocyanurate (PIR) foam is used for the door leaf, which gives the door a B-s1-d0 reaction to fire classification according to EN 13501-1.

0.6mm
Lacquered
Steel Sheet
PIR isolation
B-s1-d0

MARKED

CE



DIPPANEL, S.L.U.

Avd. Dólmenes de Valencina,
6. 41907 Valencina de la
Concepción. Sevilla.
SPAIN

www.dippanel.com

954 436 422

info@dippanel.com

Technical characteristics

FRAME	PROFILE	Frame and subframe in white lacquered extruded aluminum High resistance to anti-corrosion treatment Fixed with hidden screws and adaptable to different thicknesses	
	FEUILLE	PROFILE	Anodized extruded aluminum (stainless) High resistance to anti-corrosion treatment
		ISOLATION	Rigid polyisocyanurate (PIR) foam Classification of reaction to fire Bs1d0
FEUILLE	SHEET METAL	Thickness 0.6 mm Galvanized and white lacquered steel 1006	
	THICKNESS	40 mm	
	BURLETTE	Very flexible and resistant, with just one grip	
	VIEWFINDER	Methacrylate in 6 mm Measures: 300x400 mm	
HARNES	HINGES	Double action gray composite and stainless steel Stainless steel shaft With retention at 90 °	
		DOOR SCREWS	Stainless steel
	OPTIONS	Lock with key Lower blade protection in aluminum, stainless steel or 5 mm polyethylene checkerboard 5mm Aluminum or 3mm Stainless Steel Aircraft Wing Blade Guard Different finishes in lacquered sheet (blue, red, green, gray, etc.), stainless steel, PVC, polyester, etc.	

Detail photo of the door



DIPPANEL, S.L.U.


Avd. Dólmenes de Valencina,
6. 41907 Valencina de la
Concepción. Sevilla.
SPAIN

www.dippanel.com

954 436 422

info@dippanel.com

1-Leaf Swing Refrigerated Door

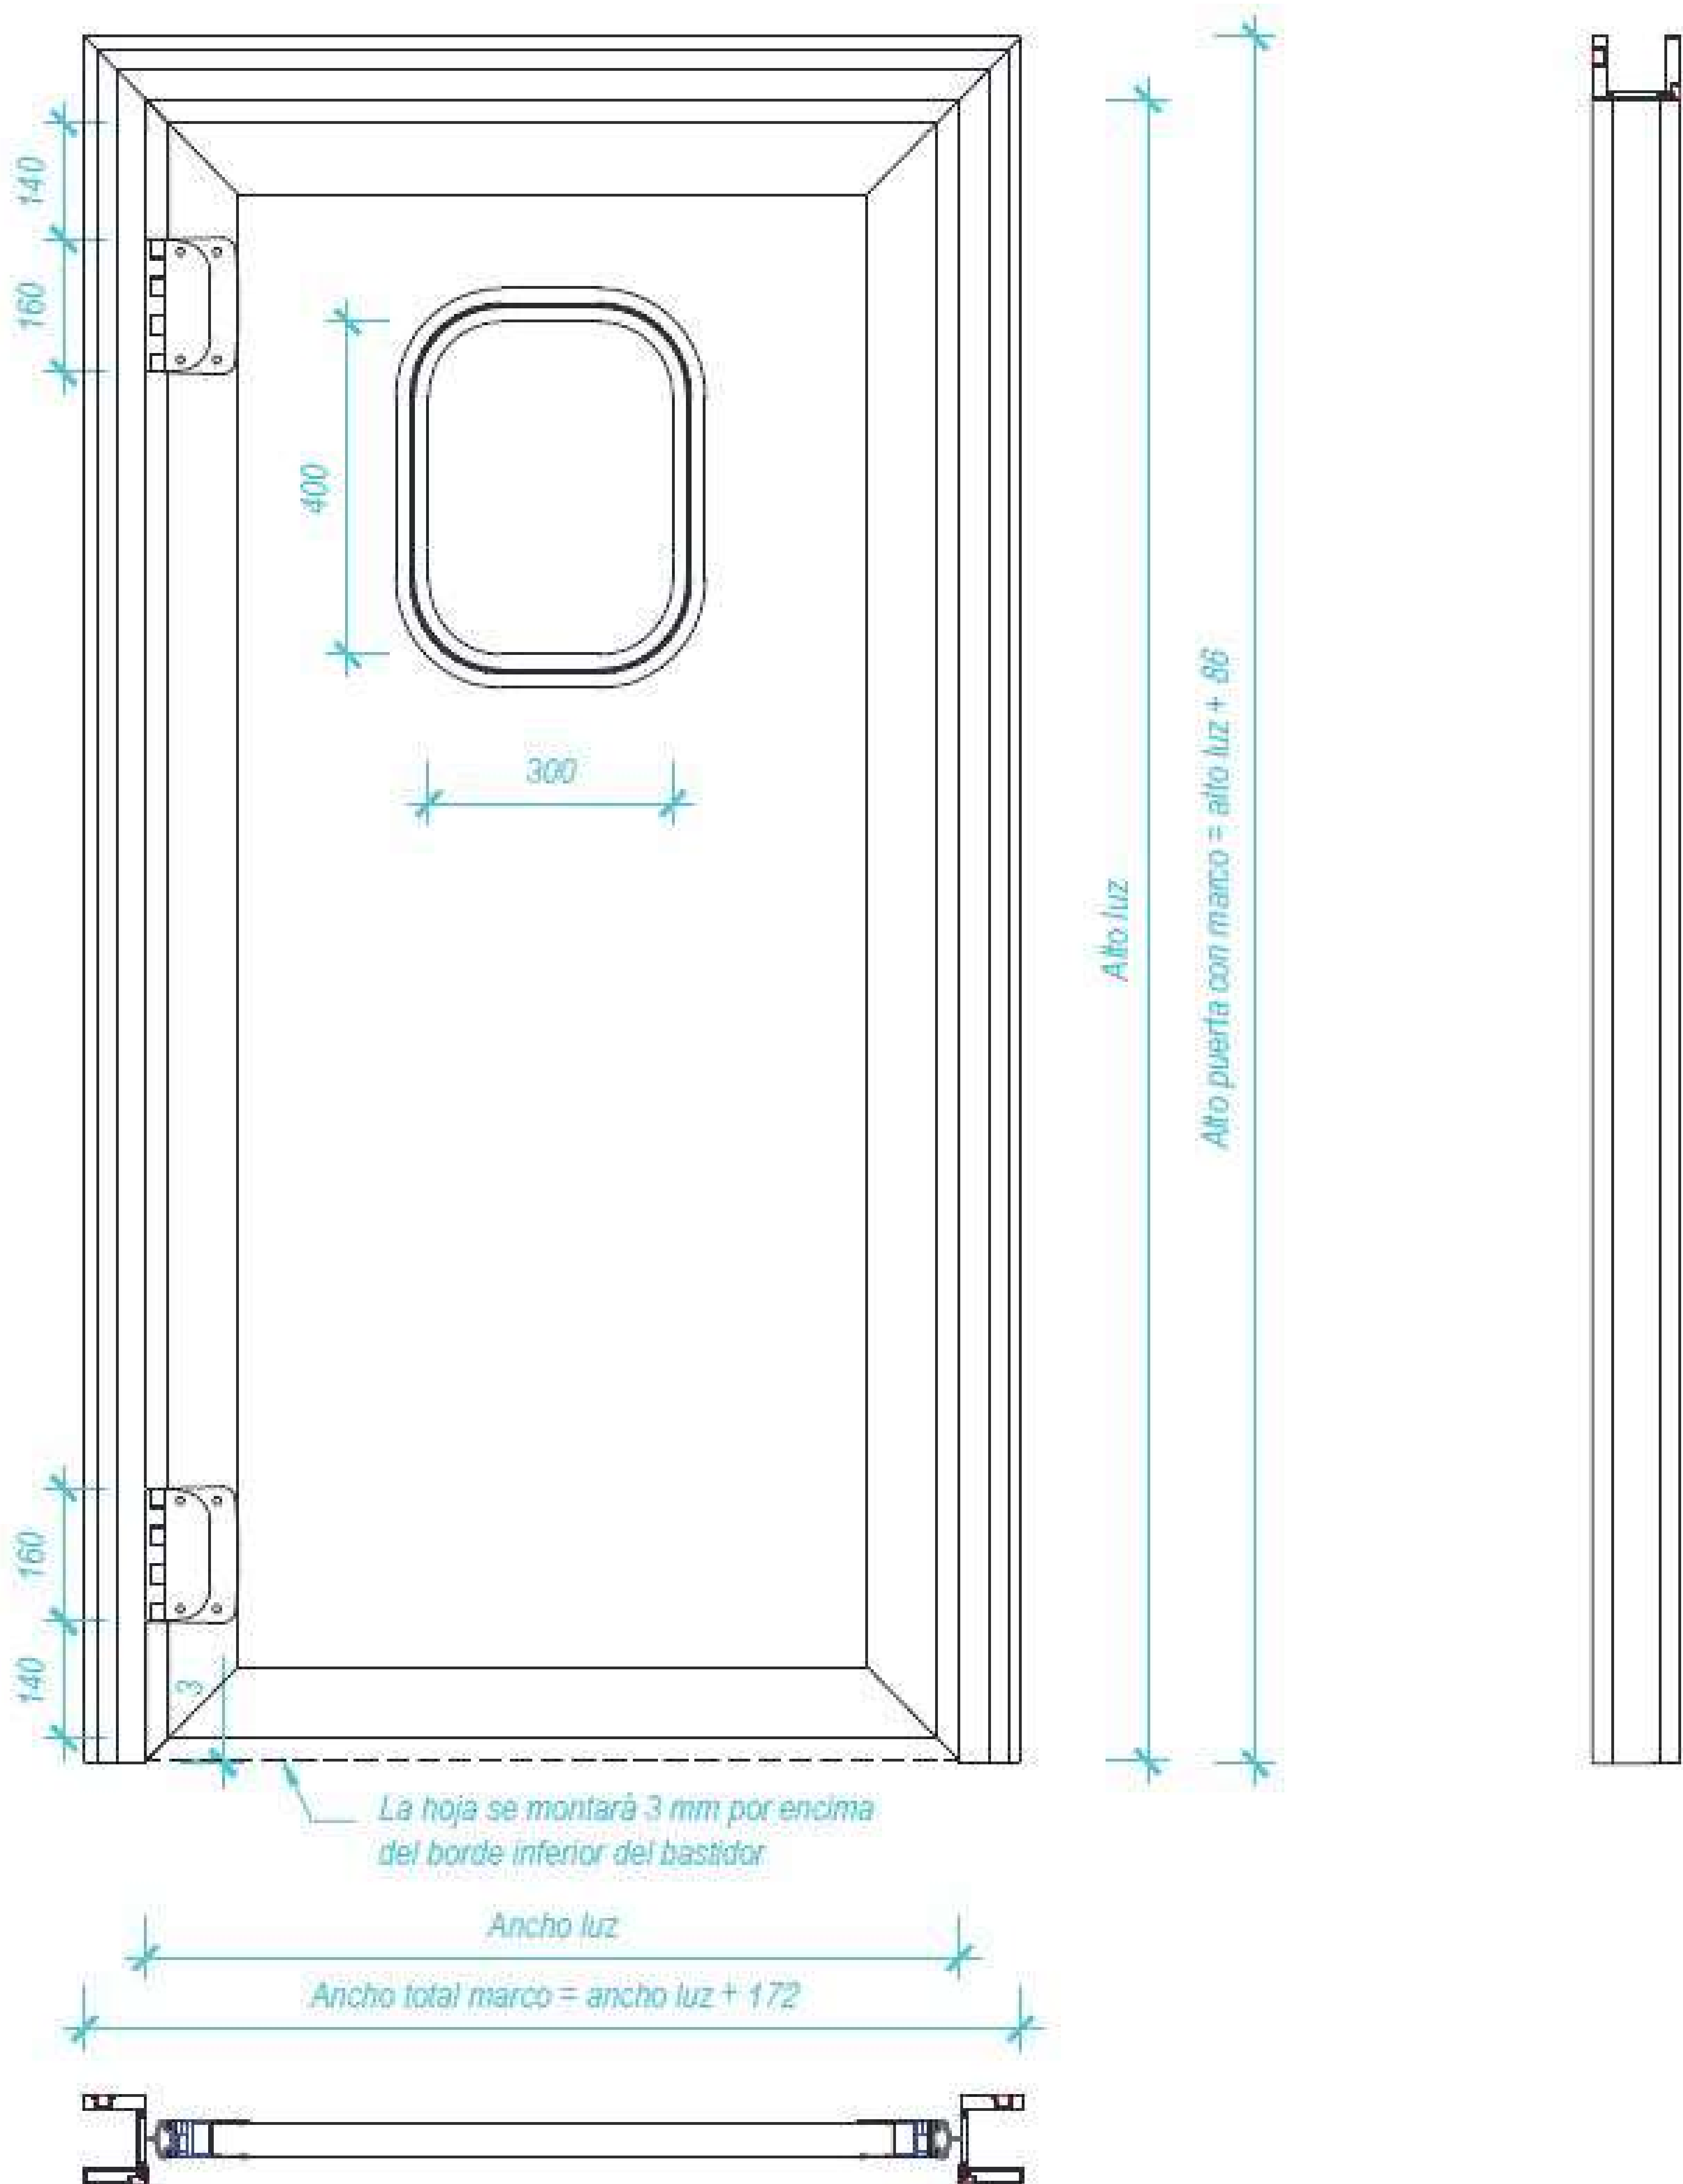

DIPPANEL, S.L.U.


C/Fomento, 6. Parque Industrial PISA. 41927. Mairena del Aljarafe. Sevilla. SPAIN

www.dippanel.com

954 436 422

info@dippanel.com

2-Leaf Swing Refrigeration Door

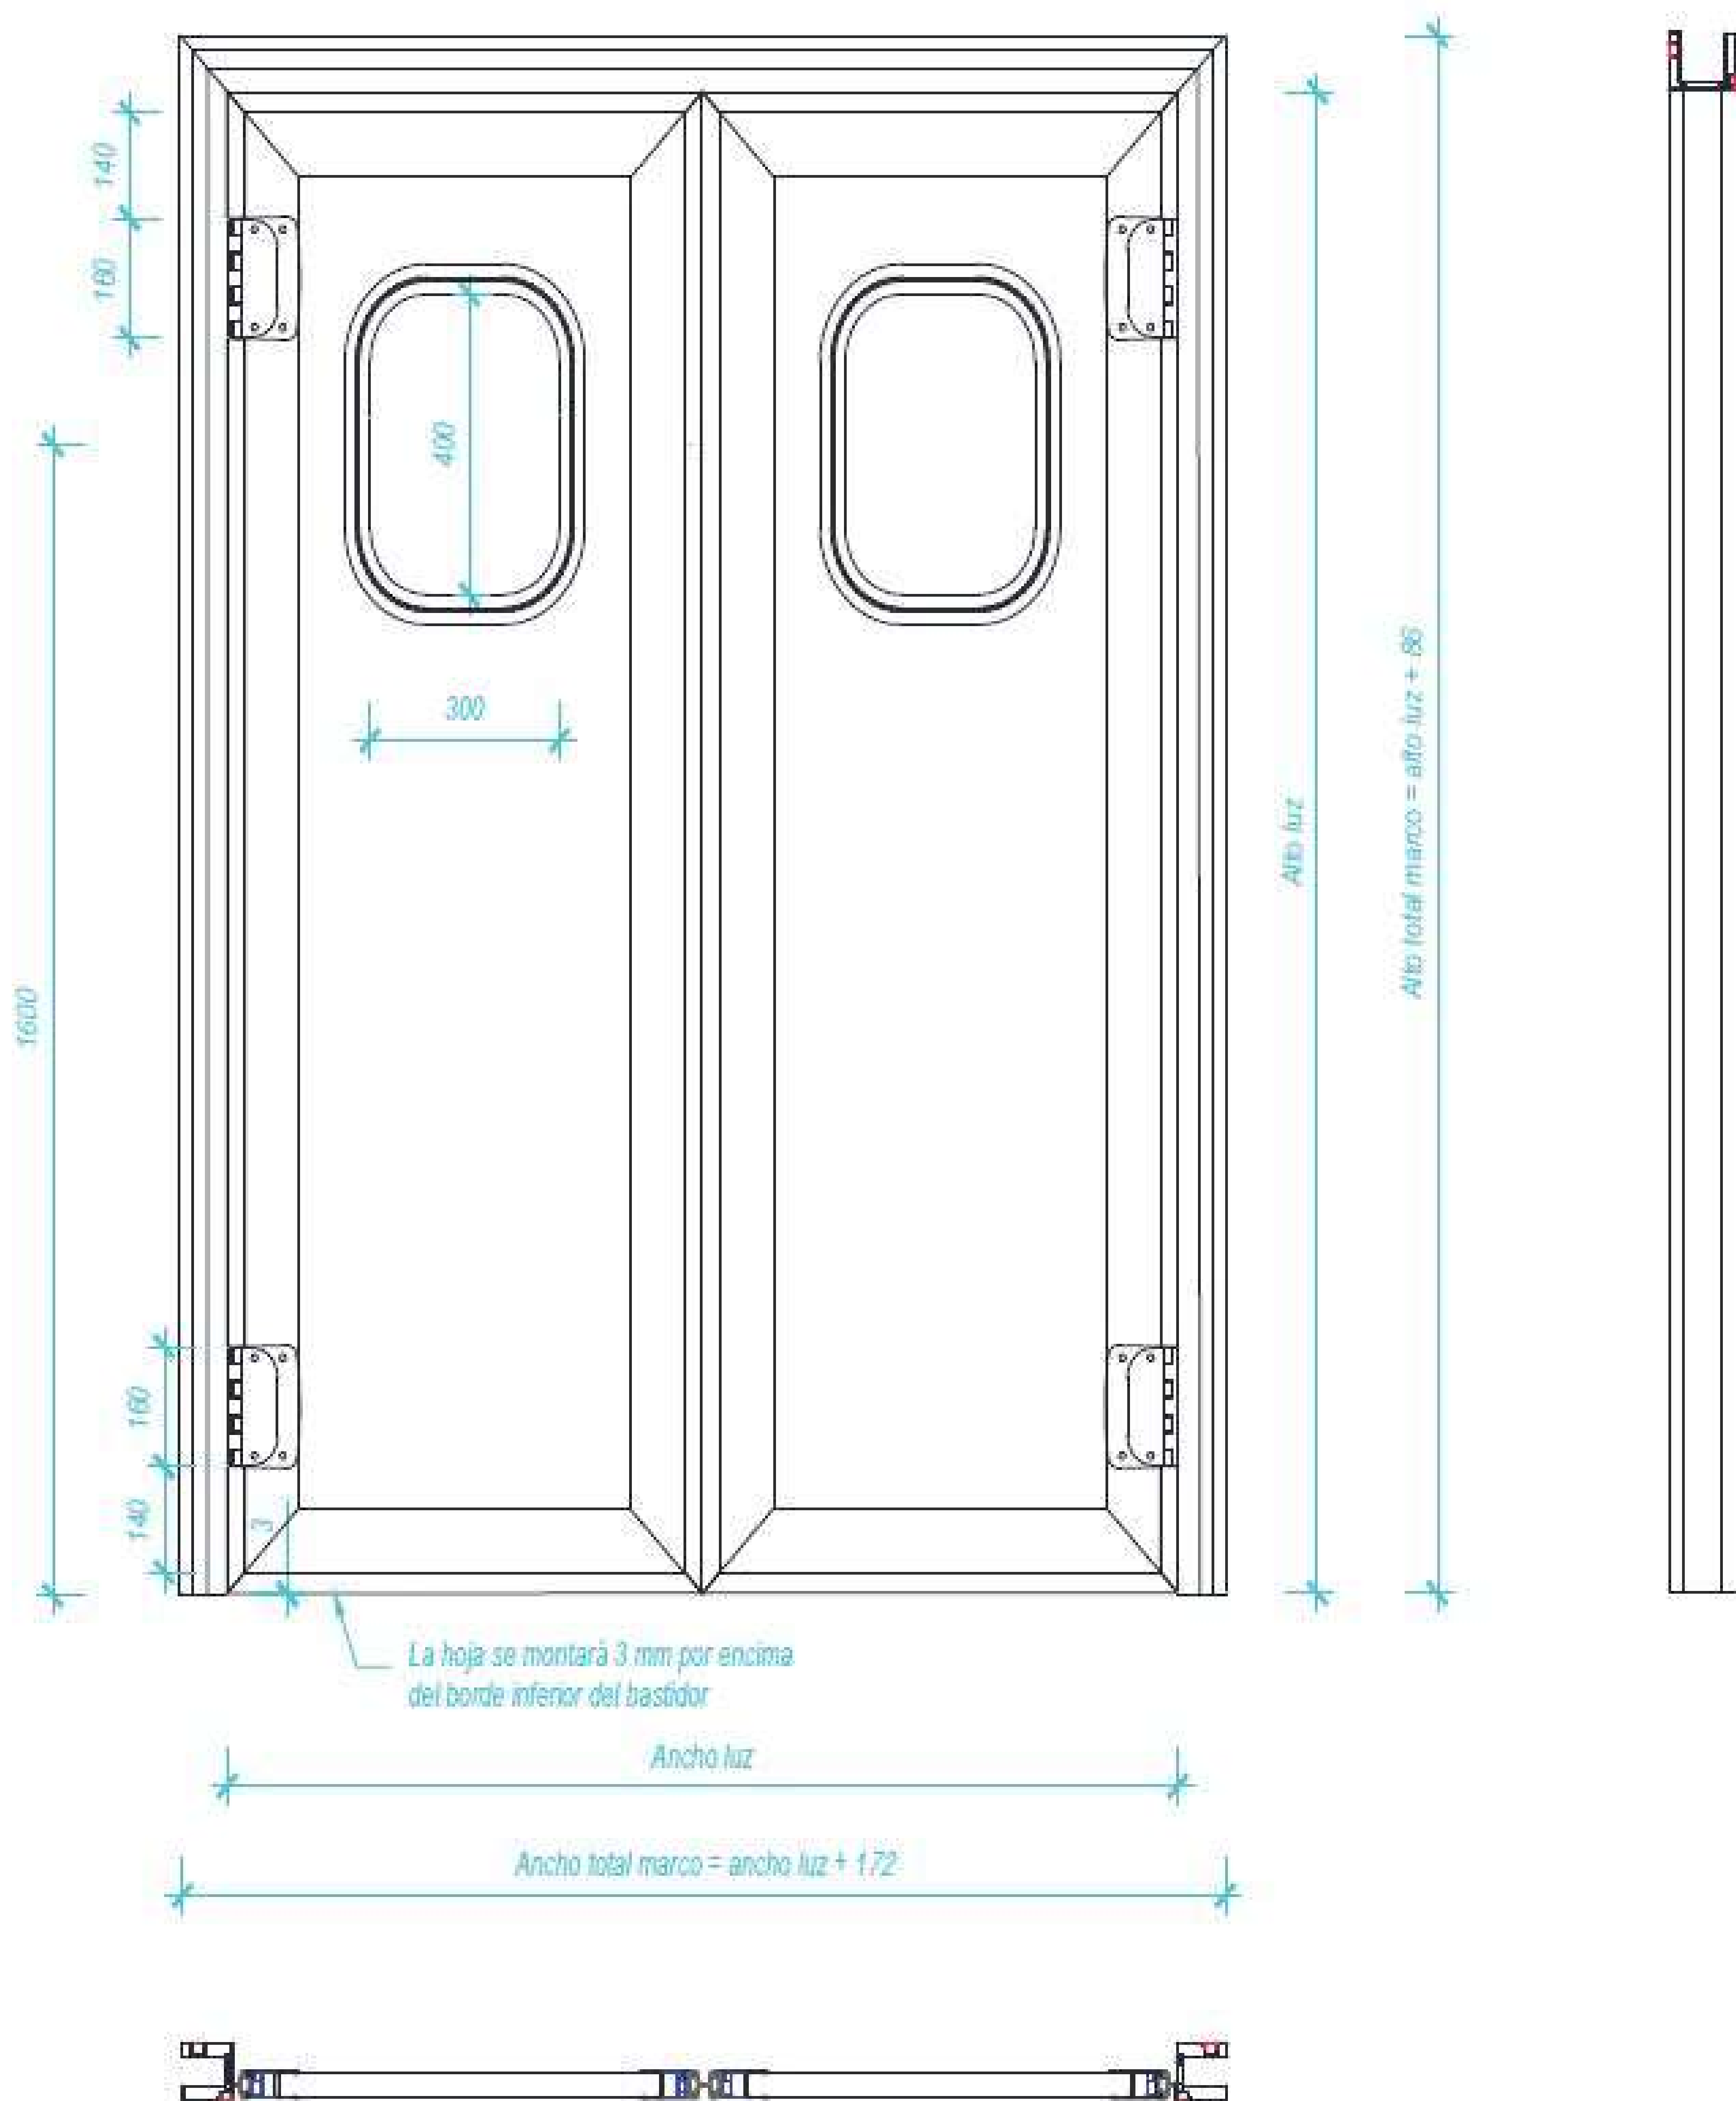

DIPPANEL, S.L.U.


Avd. Dólmenes de Valencina,
6. 41907 Valencina de la
Concepción. Sevilla.
SPAIN

www.dippanel.com

954 436 422

info@dippanel.com

2-Leaf Swing Refrigerated Door with Chapel

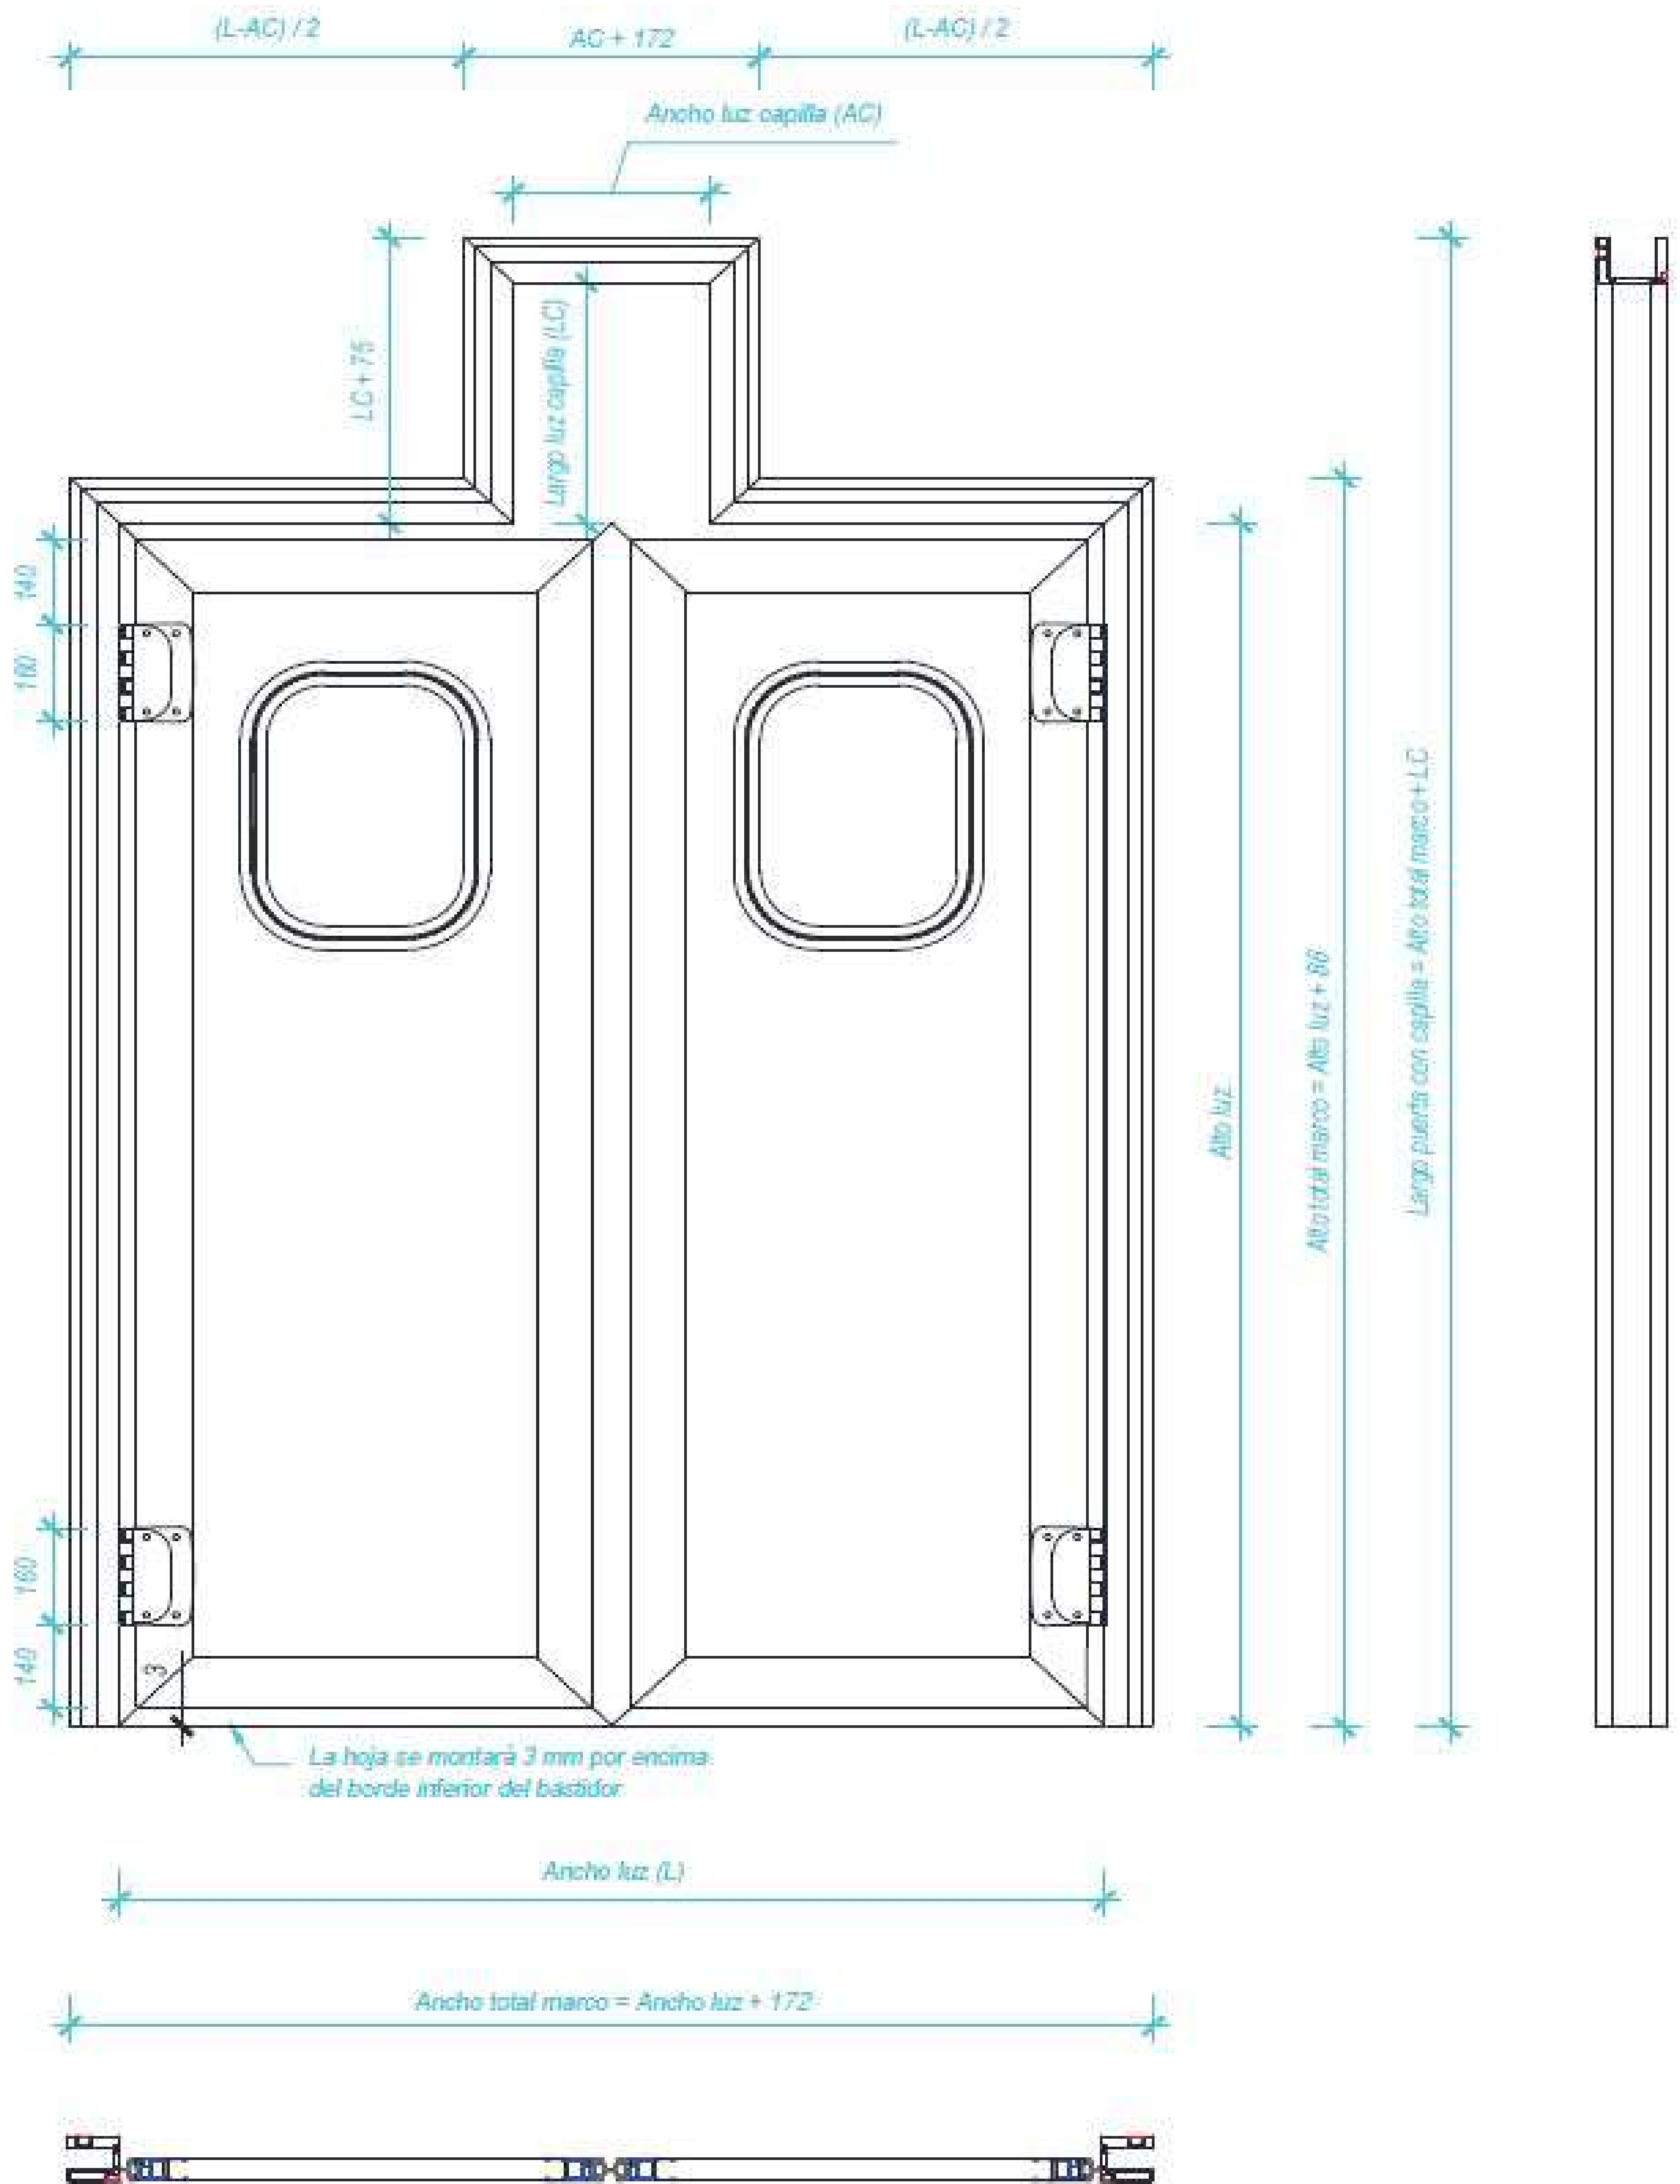

DIPPANEL, S.L.U.

Avd. Dólmenes de Valencina,
6. 41907 Valencina de la
Concepción. Sevilla.
SPAIN

www.dippanel.com

954 436 422

info@dippanel.com