

**DP-1
Commercial
Pivoting
Refrigerated
Door**




-
- B-s1-d0
 - Value for money
 - Easy installation


DP-1 Commercial Pivoting Refrigerated Door

Standard pivoting refrigerator door for storage and freezing installations.


The DP-1 Refrigeration Door is a high-performance door that presents high energy efficiency, specially designed for intense use. Its architecture is designed so that the user has to perform minimal maintenance.



Thermal isolation

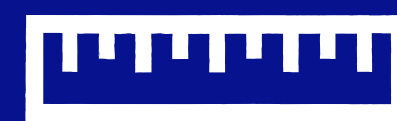

Various sizes available



Easy assembly and maintenance

Description

- The door includes a frame and counterframe in extruded aluminum with double thermal break. High resistance treatment fixed with hidden screws adaptable to different thicknesses.
- The use of high-quality materials and their design are designed so that the door has a minimum level of maintenance.
- The door leaf is made up of a refrigeration panel with polyisocyanurate (PIR) foam that gives the door a B-s1-d0 reaction to fire classification according to the EN 13501-1 standard.

DIPPANEL Doors stand out for:

- Quality of finishes
- Easy assembly and installation
- Adaptability to customer needs

Technical characteristics

FRAME

PROFILE

- White lacquered extruded aluminum frame and counter frame
- High resistance treatment
- Double thermal bridge break
- Fixed with hidden screws and adaptable to different thicknesses

SIDEWALK

- Reinforced aluminum profile, with housing for frost resistance (Low Temperature)
- High calorific resistance (temperatures down to -20°)

LEAF

PROFILE

- Anodized extruded aluminum (stainless)
- High corrosion resistance treatment
- With thermal bridge break

ISOLATION

- Rigid polyisocyanurate (PIR) foam
- Reaction to fire classification: B-s1-d0

THICKNESSES

- 60mm (Cooling)
- 80mm (Freezing down to -15°)
- 100mm (Freezing down to -20°)

LOCK

- Galvanized steel and white lacquered RAL 1006
- Sheet thickness 0.6mm

BURLETTE

- Very flexible, double-celled and resistant to negative temperatures

IRONWORK

OPENING

- Composite hinges, regular, with lifting ramps and stainless steel shaft
- Composite closure, incorporated in sheet with a pressure point
- Push-button interior lever with reflective markings
- Easy opening and closing, specially designed for the commercial sector

SCREWS

- Stainless steel

OPTIONS

- Key lock with interior unlocking. Possibility of the same key for several doors
- Lower area blade protection in 5mm checkerboard aluminum, stainless steel or polyethylene
- Fixed visor with "Climalit" type glass
- Various finishes in lacquered sheet of various colors, stainless steel, PVC, Polyester, imitation wood, etc.
- Frame with chapel for passages of aerial channels

DP-1 PHOTOS





dippanel

CONTACTO:

- (+34) 954 436 422
- (+34) 675 534 289
- info@dippanel.com

Avd. Dólmenes de Valencina, 6
41907. Valencina de la Concepción.
Seville. Spain