

Fast Doors

-
- Finishes
 - High energy efficiency
 - Minimal maintenance
 - Sturdiness

Fast Doors

Fast Doors are the ideal solution for all the requirements of intensive use and isolation of spaces with different environments and characteristics. Robust, practical and ideal for small, medium and large spaces, thus separating the most diverse types of environments.


Supermarkets, hypermarkets, warehouses, loading and unloading docks, platforms, laboratories and pavilions, are spaces where isolation is essential and all of them find in this product, the most flexible, viable and robust response.



Frame and drum cover in white lacquered aluminum



Sensor opening without the need to touch a button



Easy to assemble and maintain

Description

- High-speed roll-up doors can be manufactured with a maximum width of 4500 mm and a maximum height of 4500 mm. The doors have an attractive design and are made of a lacquered aluminum structure
- **PVC canvas thickness:** it has a grammage of 950 gr / m² and a thickness of 0.8mm
- **Insulation:** Dippanel offers two types of high speed doors. Some for positive temperatures and others for negative temperatures of up to -22°C

Dippanel Fast Doors stand out for:


- Finishes
- Easy Assembly and Maintain
- Different options, according to client

Technical characteristics

Medida máx.	4500mm x 4500mm
Medida mín.	1000mm x 2000mm
Alimentación Eléctrica	230 V
Corriente Eléctrica	2A
Motoreductor	Sommer
R.p.m.	140 rpm
Fases	3-230/400 V
Potencia	0,55 kw
Grado de Protección del Motor	IP54
Velocidad de Apertura	0,8 m/s a 1,2 m/s
Temperatura de Funcionamiento	-22 °C a +60 °C
Maniobras Diarias	± 1000
Cierre automático	0 s a 999 s
Alimentación de accesorios	12 Vac
Tipo de Tracción	Directa
Material de la lona	P.V.C.
Peso de la lona	950 gr/m ²
Espesor de la lona	0,8 mm
Material transparente	P.V.C. Mica
Espesor sección transparente	2,2 mm
Frecuencia	50/60 Hz
Base de la máquina	Aluminio
Tapa de la máquina	Aluminio
Guías verticales	Aluminio
Barra de seguridad	Cortina de Luz

Options

- SELF-REPAIRING
- REINFORCED INTERIOR
- REINFORCED EXTERIOR
- STACKABLE

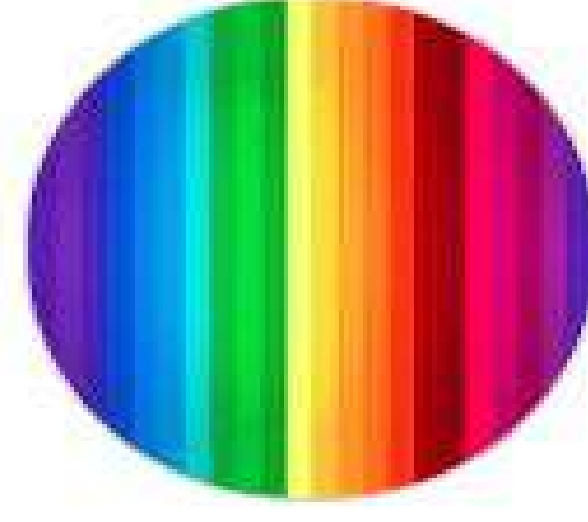

DIFFERENT COLORS IN OPTION

DETALLES PUERTA



Opening sensor. No need to touch a button



Gearmotor



Real application in DIPPANEL project at "Flor de Doñana"



dippanel

CONTACTO:

- (+34) 954 436 422
- (+34) 675 534 289
- info@dippanel.com

Avd. Dólmenes de Valencina, 6. 41904,
Valencina de la Concepción. Sevilla (España)