



## Panel Description

The panels are made of two steel sheets adhered by an organic adhesive to the Rock Wool core. Steel sheets can range from 0.5mm to 1mm, with 0.5mm being the standard thickness for this type of panel. The coatings are applied depending on the use of the panel, the standard coating being polyester SP25. On request, panels are offered with other materials such as aluminum or stainless steel.

The Rock Wool core complies with the European standard EN 13162


## Classification against fire

Our rock wool core panels have a reaction to fire classification A2-s1-d0, according to standard EN 13501-1

## Applications


- Heated premises.
- Interior acoustic shielding in industrial facilities.
- Manufacturing premises.
- Premises where high fire resistance is an essential requirement.
- Fireproof enclosures (garages, warehouses for dangerous substances ...)
- Buildings where the activity is changing or for rent.

## Panel Board

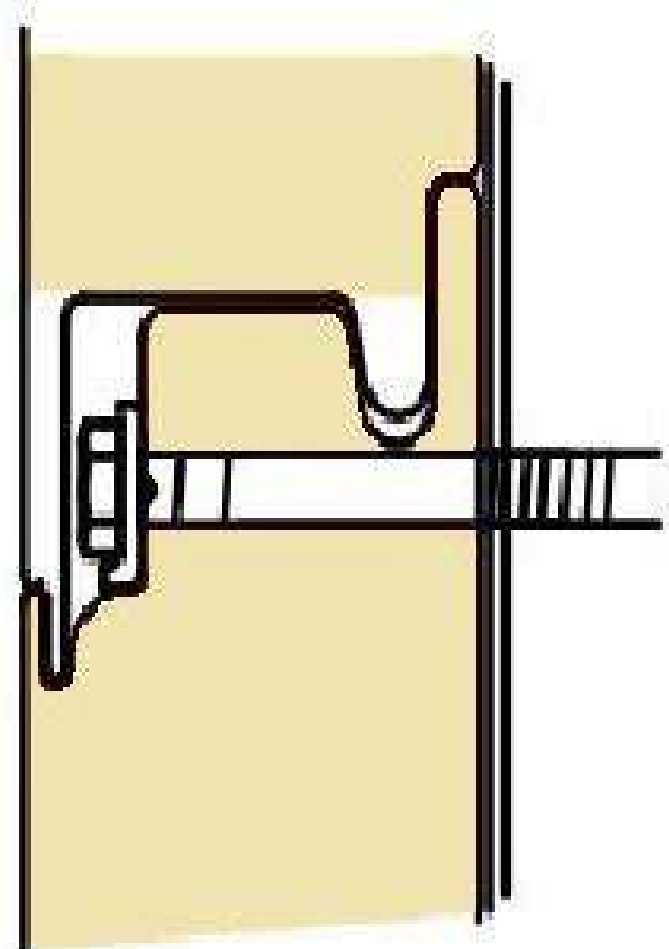

The facade panel with hidden screws allows a better design for the facade as well as a finer finish

## Acoustic Panel Detail

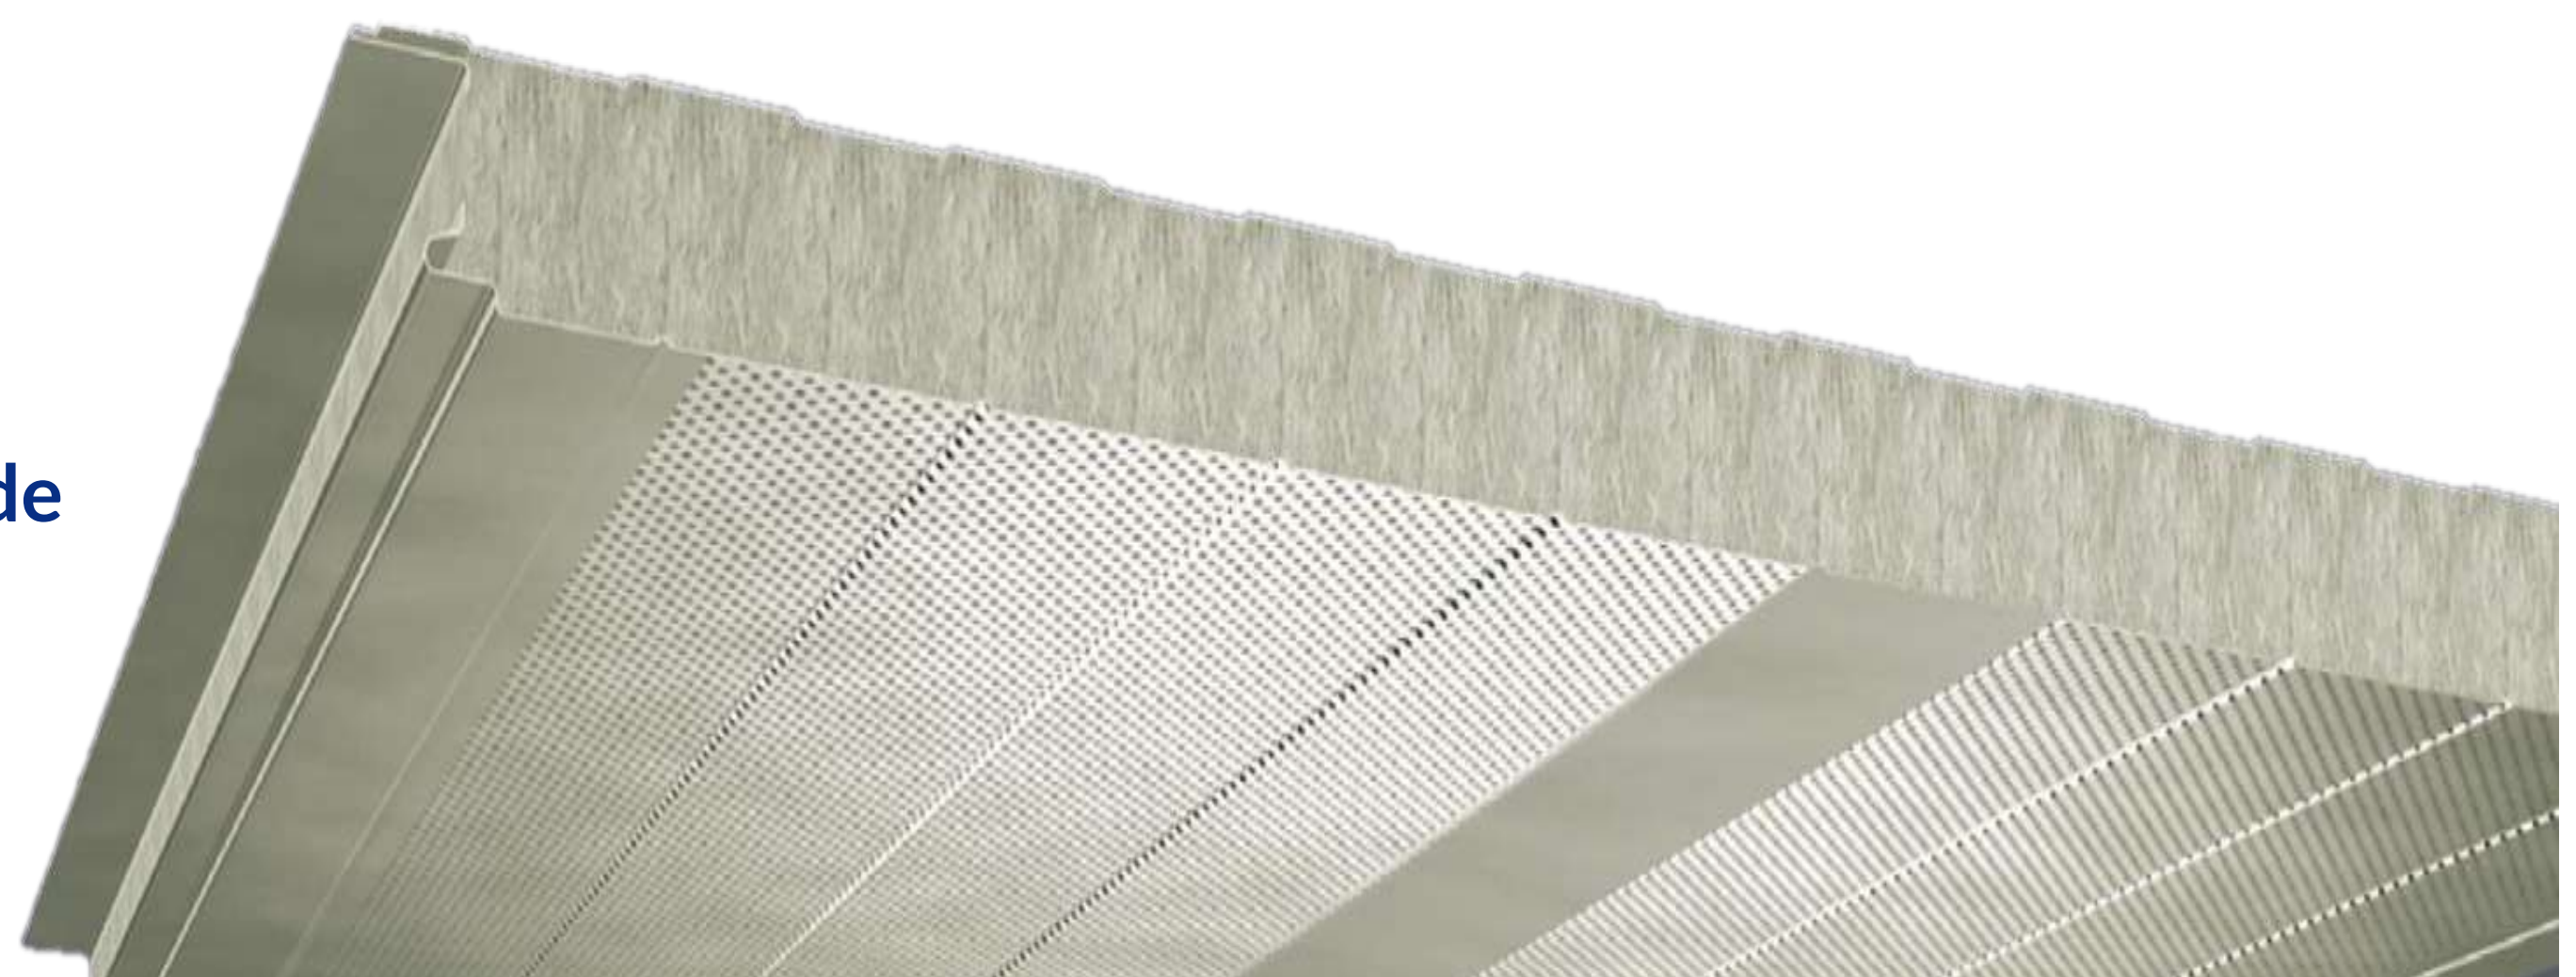


## Profile and Panel Section

Useful Width  
1.150mm



Perfil liso

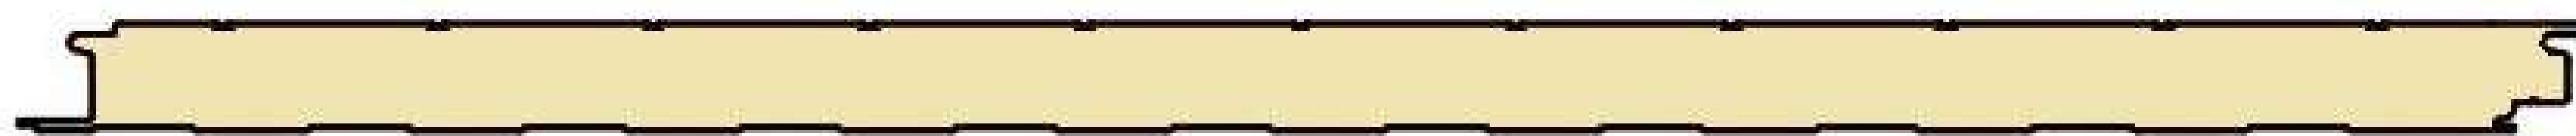

Perfil estándar



Perfil microperforado

## Technical specifications of the product

PANEL FACHADA ACÚSTICO LANA DE ROCA BAJA DENSIDAD									
Espesor (mm)	Ancho (mm)	Long. Máx. recomendada (m)	Tipo de núcleo	Peso kg/m <sup>2</sup>	Coef. Trans. Térmica W/m <sup>2</sup> K	Resistencia frente al fuego	Comportamiento acústico		
							Rw (dB)	RA (dBA)	α W
50	1.150	7	L	11,9	0,690	Propiedad no declarada	31	30,6	0,9
60	1.150	7	L	12,8	0,592	Propiedad no declarada	≥31	≥30,6	0,9
80	1.150	9	L	14,6	0,455	Propiedad no declarada	34	34,2	0,85
100	1.150	10	L	16,4	0,370	Propiedad no declarada	≥34	≥34,2	0,85
120	1.150	11	L	18,2	0,308	Propiedad no declarada	≥34	≥34,2	0,85
150	1.150	12	L	20,9	0,253	Propiedad no declarada	≥34	≥34,2	0,85
200	1.150	12	L	25,4	0,192	Propiedad no declarada	≥34	≥34,2	0,85

### Bi-supported panel overload table:

PANEL FACHADA ACÚSTICO LANA DE ROCA BAJA DENSIDAD									
Propiedades mecánicas a la flexión. Tabla sobrecarga de panel biapoyado									
Espesor (mm)	Sobrecarga kg/m <sup>2</sup>	30	60	80	100	120	150	200	
50	Luz (m)	5,07	3,22	2,45	1,96	1,64	1,30	1,05	
60	Luz (m)	5,25	3,40	2,75	2,50	2,06	1,60	1,20	
80	Luz (m)	5,99	4,07	3,35	2,91	2,64	2,11	1,35	
100	Luz (m)	7,14	4,85	3,95	3,53	3,22	2,64	1,55	
120	Luz (m)	8,20	5,70	4,50	4,12	3,85	3,03	1,90	
150	Luz (m)	9,10	7,30	6,08	5,60	5,12	4,25	2,80	
200	Luz (m)	11,00	9,80	8,15	7,55	6,25	5,60	4,00	

Flecha L/200. Coeficiente de seguridad: 2,5

**Useful limit temperature:** applications from -5°C to + 180°C

**Not Hydrophilic.**

**Standard colors:** other colors, ask and on request

Cara Exterior	Color	Cara Interior	Color
Blanco Pirineo		Blanco Pirineo	
Verde Navarra		Blanco Pirineo	
Crema Bidasoa		Blanco Pirineo	
Rojo Teja		Blanco Pirineo	
Gris Perla		Blanco Pirineo	
Silver Metallic RAL 9006		Blanco Pirineo	



DIPPANEL, S.L.U.

Avd. Dólmenes de Valencina, 6 (P.I.LOS GIRASOLES).

41907. Valencina de la Concepción (Seville)

Spain

www.dippanel.com

954 436 422

info@dippanel.com