



**SANDWICH
PANEL
COVER 3
BORDERS**

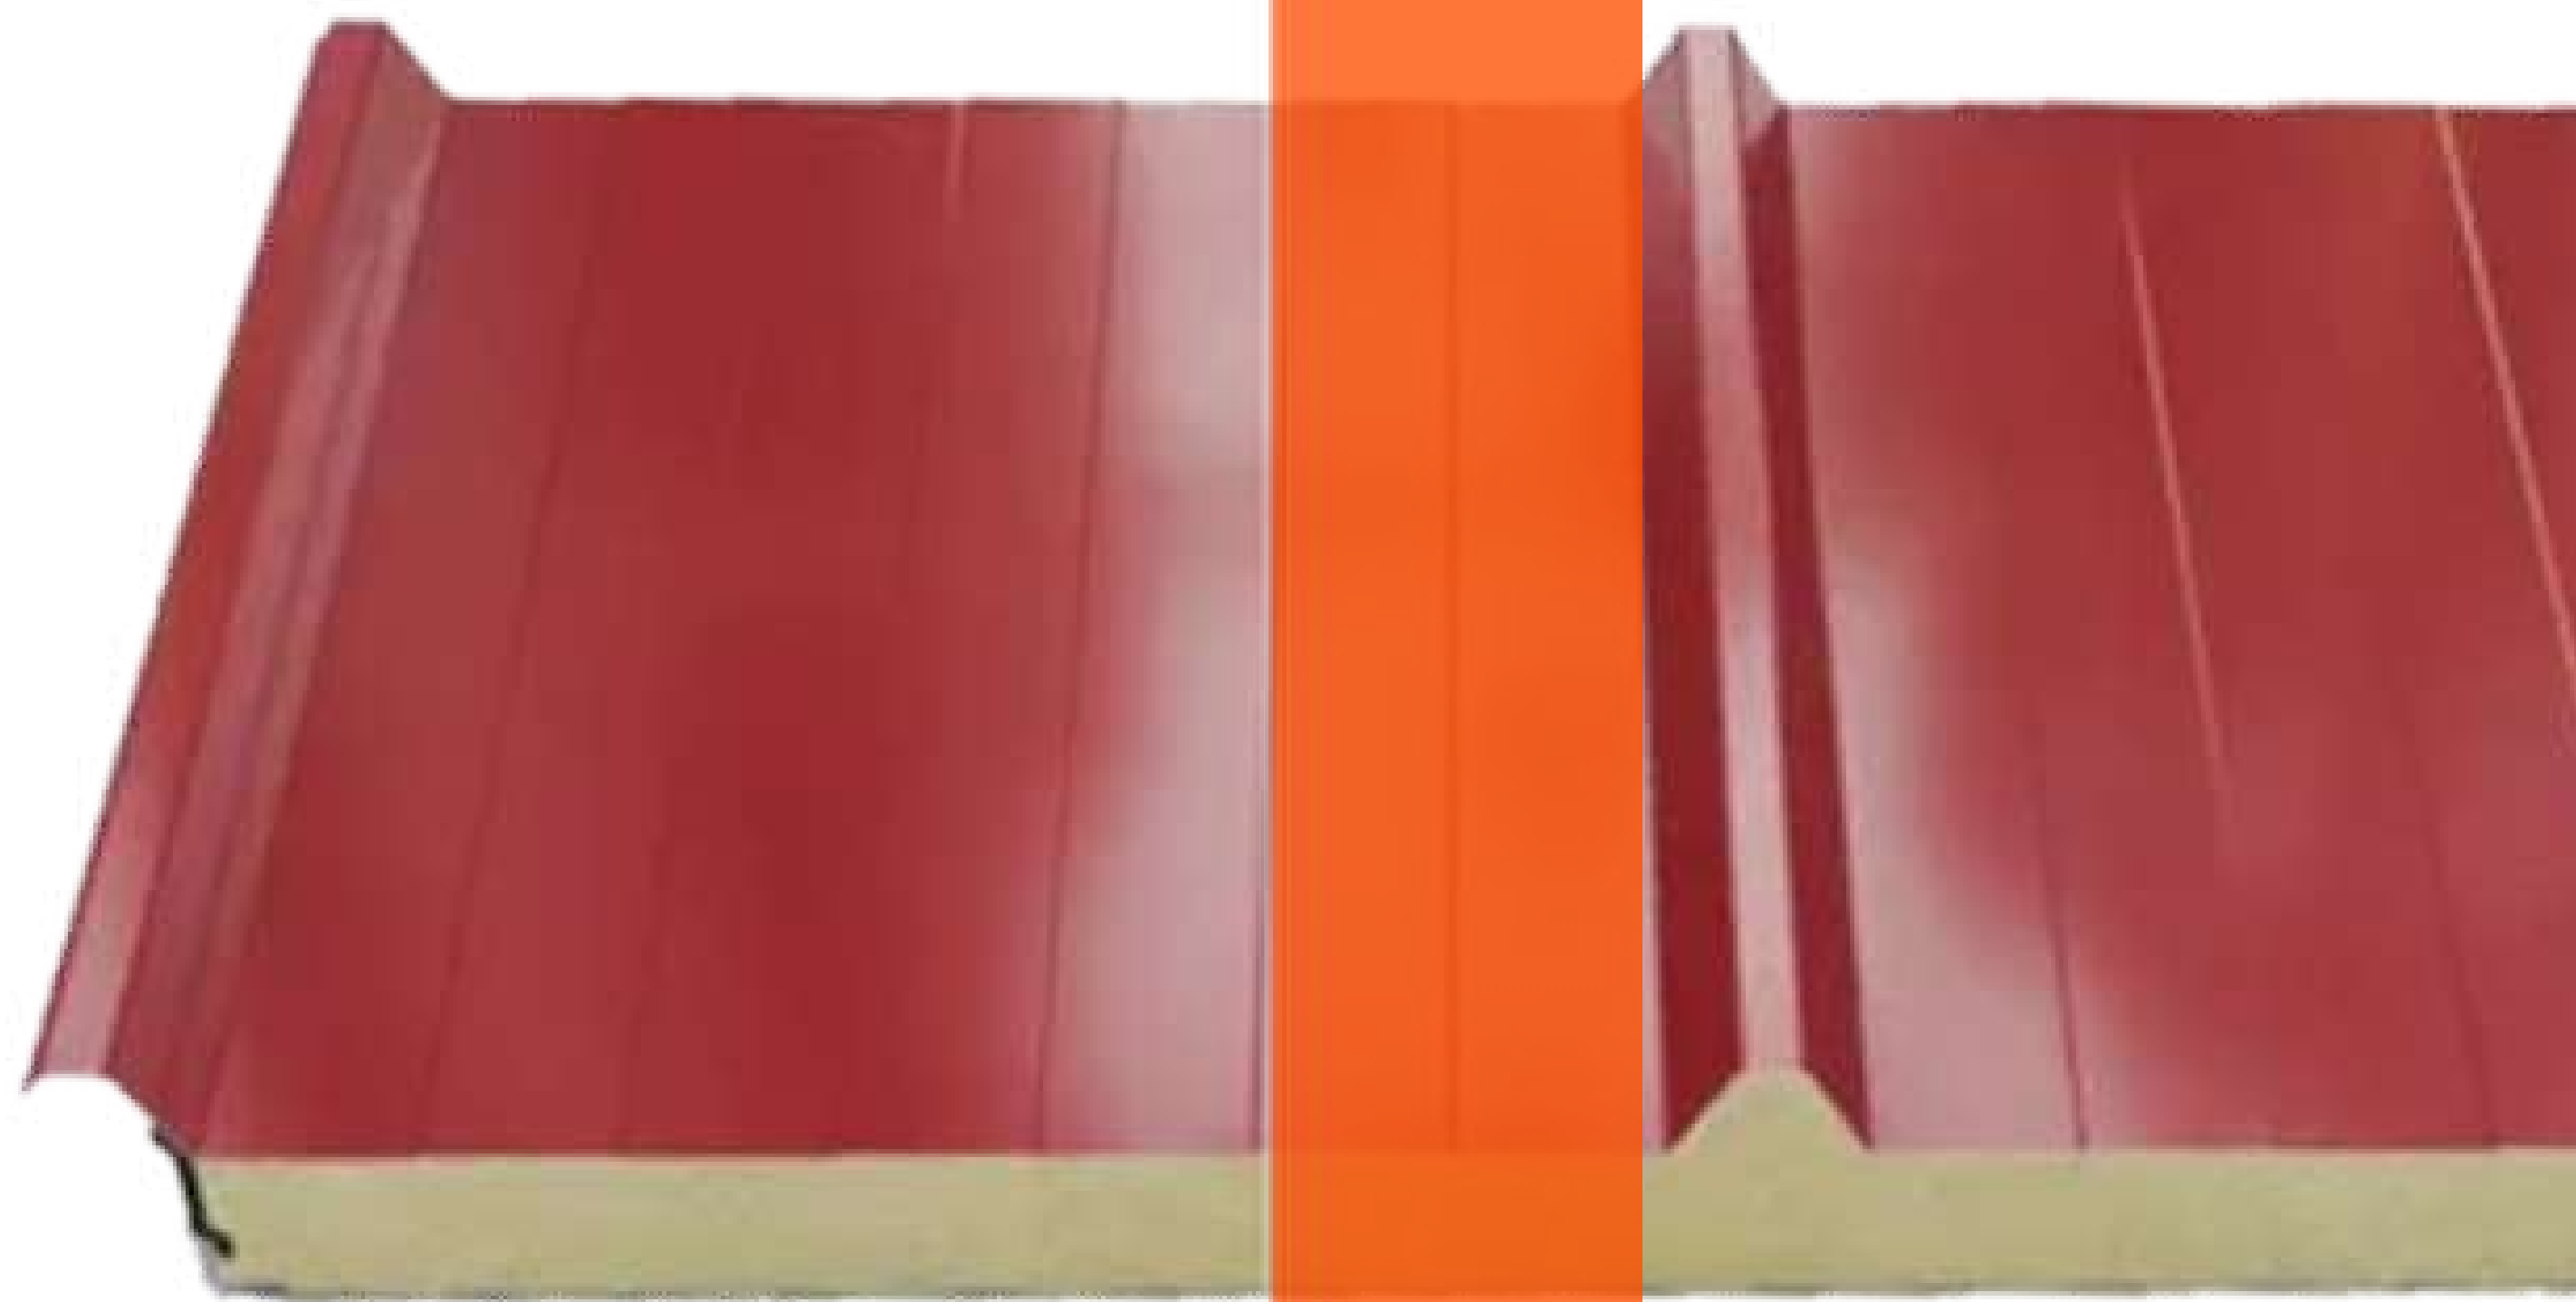


-
- Easy assembly and installation
 - PIR-E (B-s2-d0) & PIR (B-s1-d0)

Sandwich Panel Cover 3 Borders


Thanks to the design of this panel, it becomes the perfect solution for roofs of industrial buildings such as warehouses, factories or logistics centers. Its finish provides a modern image to the roofs where it is installed in addition to giving a degree of energy efficiency to the installation due to the thermal insulation of the panel.



Thermal isolation

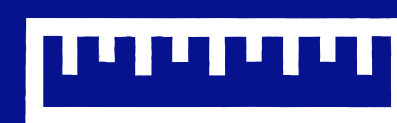

Availability of various sizes and thicknesses



Easy assembly and installation

Description

- Self-supporting roof panels without flashing are made up of a steel sheet on each face and a core of rigid Polyurethane (PIR-E - B-s2-d0) or Polyisocyanurate (PIR - B-s1-d0) foam. They are designed as an enclosure for sloping roofs with a minimum slope of 5% on non-overlapping roofs and 7% on overlapping roofs.
- The maximum recommended length for this panel is 16,500mm with a useful width of 1,000mm

DIPPANEL Sandwich Panels stand out for:


- Quality of finishes
- Easy assembly and installation
- Adaptability to customer needs

Technical characteristics

PANEL SANDWICH CUBIERTA


ESPESOR (mm)	PESO (kg/m ²) 0,4+0,4 (mm)	TRANSMITANCIA U (W/m ² k)	LUZ ADMISIBLE L(m)							LUZ ADMISIBLE L(m)						
			SOBRECARGA P (daN/m ²)							SOBRECARGA P (daN/m ²)						
30	6,67	0,74	60	80	100	120	150	200	250	60	80	100	120	150	200	250
40	7,08	0,57	2,71	2,38	2,14	1,96	1,77	1,54	1,38	2,25	1,97	1,78	1,63	1,46	1,27	1,14
50	7,48	0,46	3,02	2,65	2,39	2,19	1,97	1,72	1,54	2,72	2,39	2,15	1,97	1,77	1,54	1,38
60	7,88	0,39	3,30	2,90	2,62	2,40	2,16	1,88	1,69	3,17	2,78	2,50	2,30	2,07	1,80	1,61
30	7,56	0,74	3,57	3,14	2,83	2,60	2,34	2,04	1,84	3,59	3,15	2,84	2,60	2,34	2,04	1,83
40	7,96	0,57	3,00	2,64	2,38	2,18	1,96	1,71	1,54	2,99	2,72	2,45	2,25	2,02	1,76	1,58
50	8,37	0,46	3,33	2,92	2,64	2,42	2,18	1,90	1,71	3,48	3,19	2,97	2,73	2,45	2,14	1,92
60	8,77	0,39	3,64	3,19	2,88	2,65	2,38	2,08	1,87	3,95	3,62	3,38	3,18	2,86	2,49	2,24
			3,92	3,45	3,12	2,86	2,58	2,25	2,02	4,39	4,03	3,76	3,55	3,25	2,83	2,54

- Profile and panel section

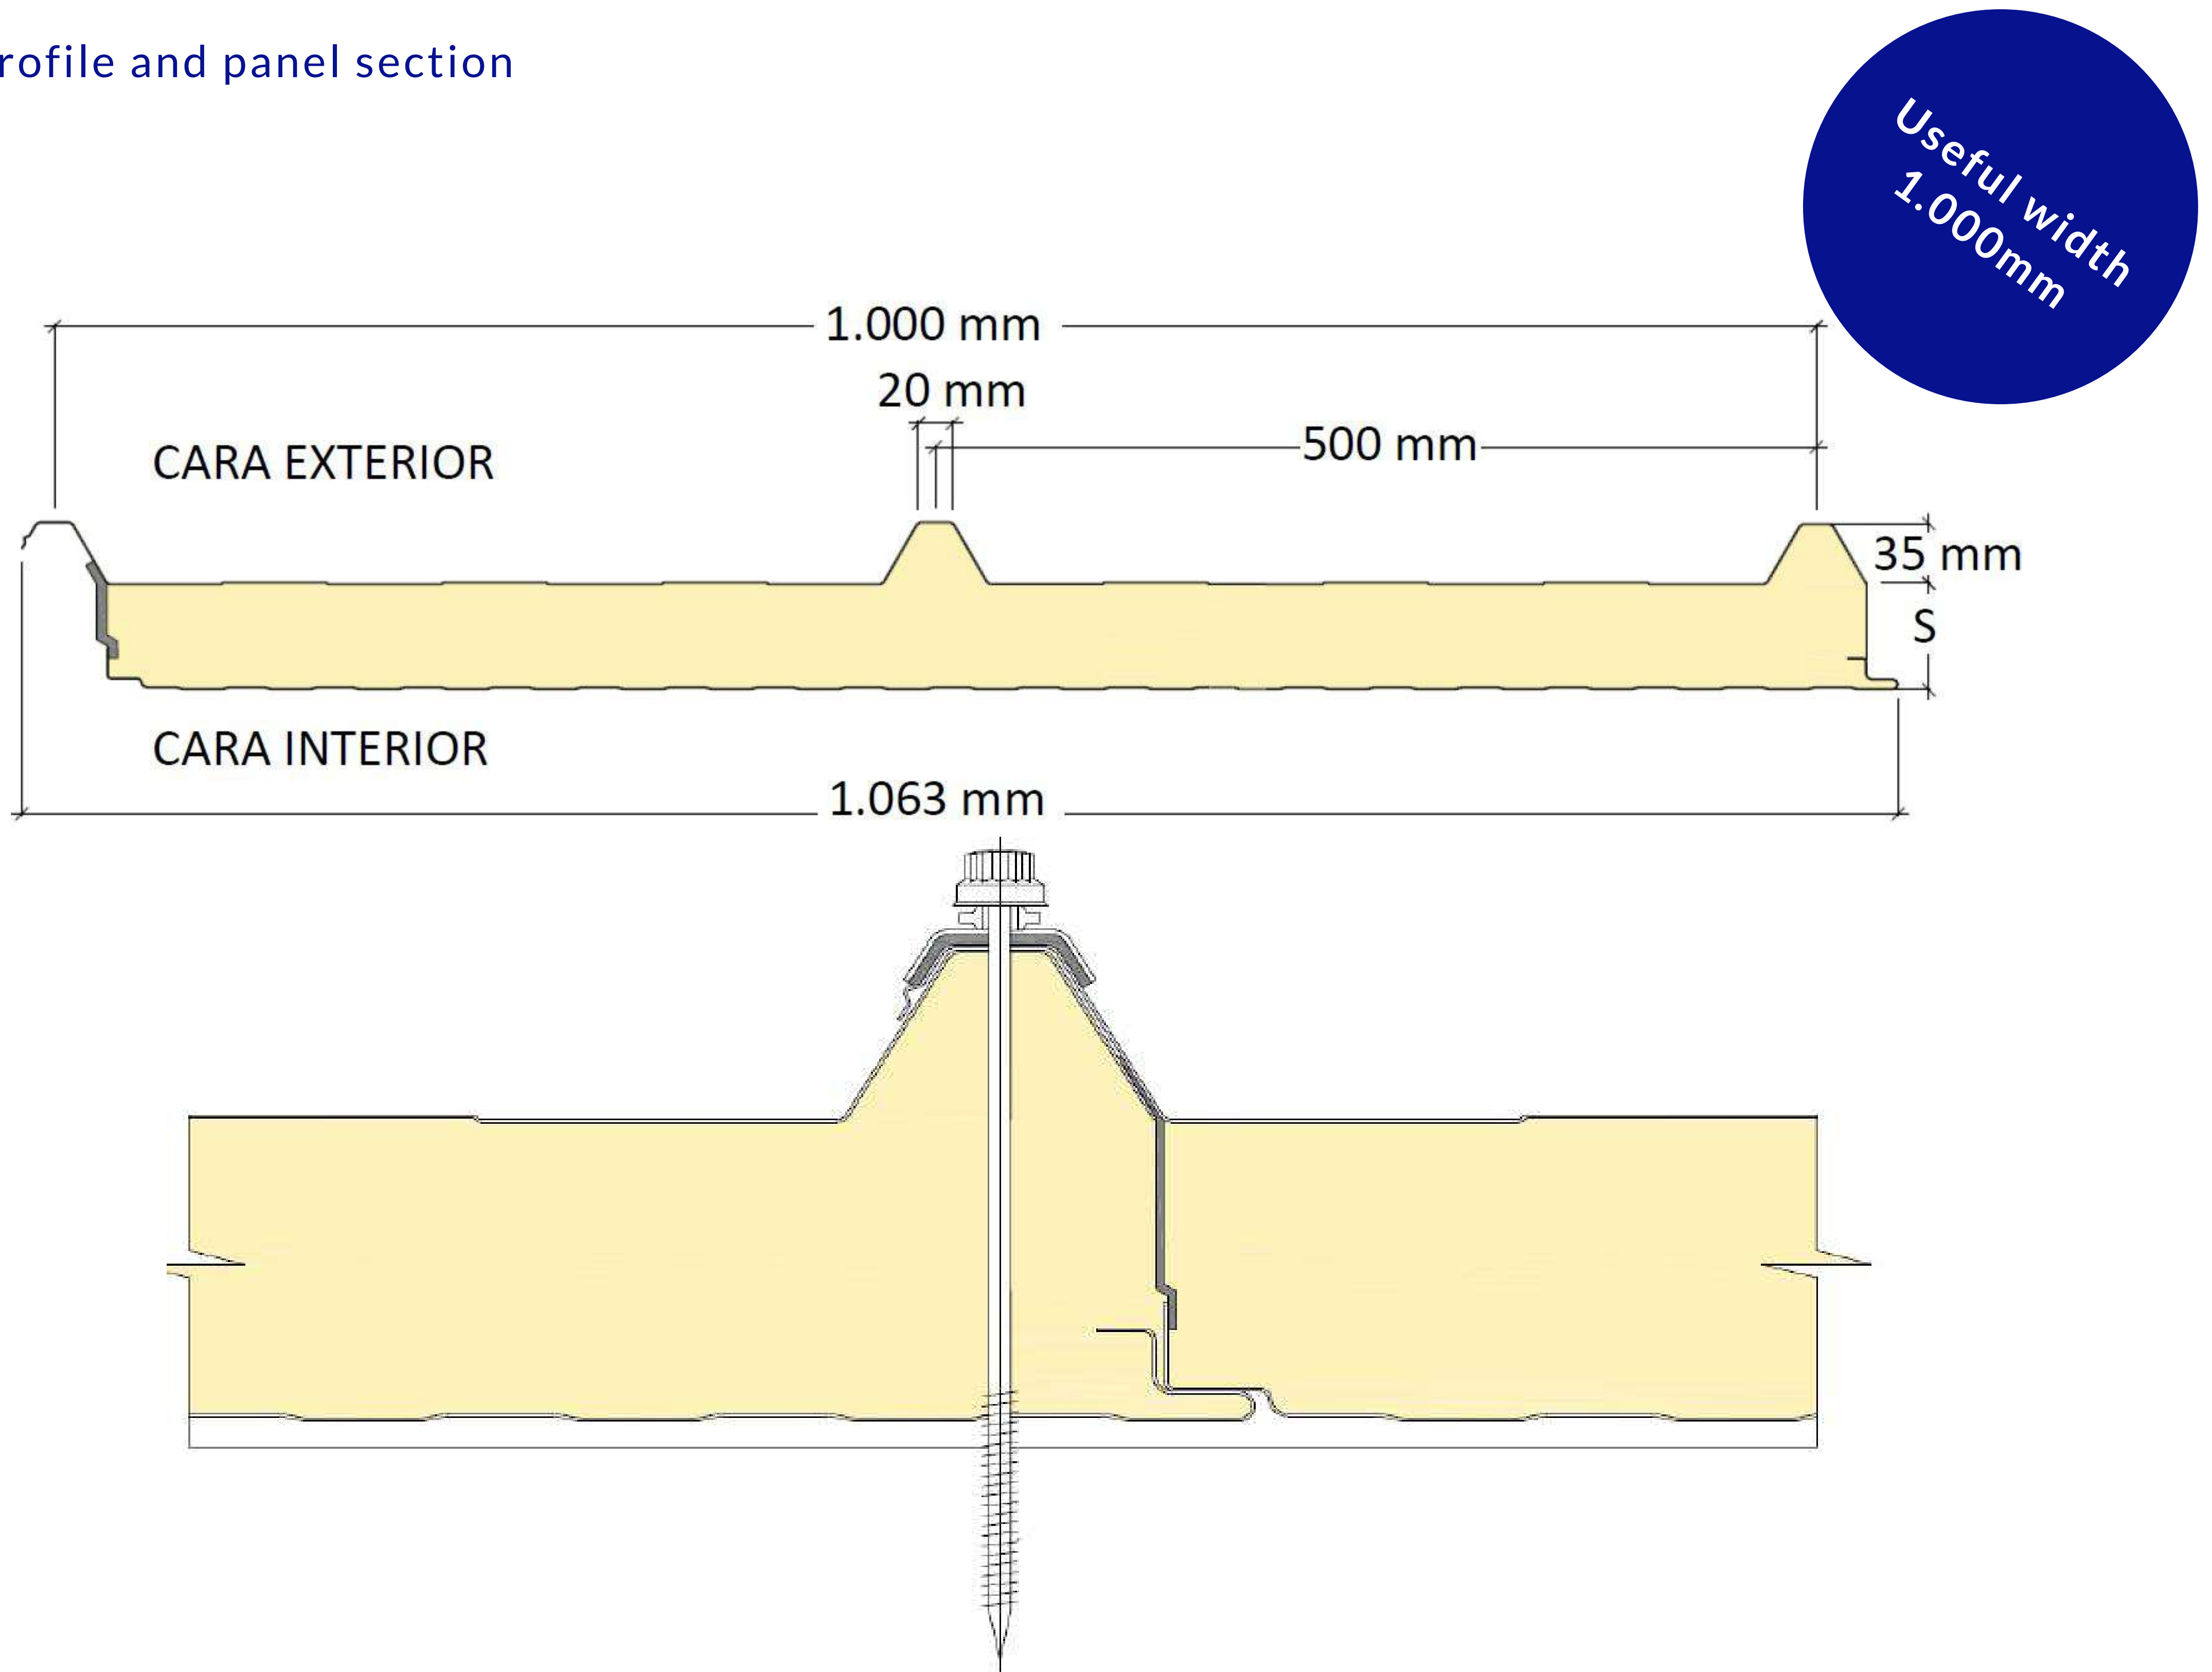

Technical characteristics

- Panel Visual Detail

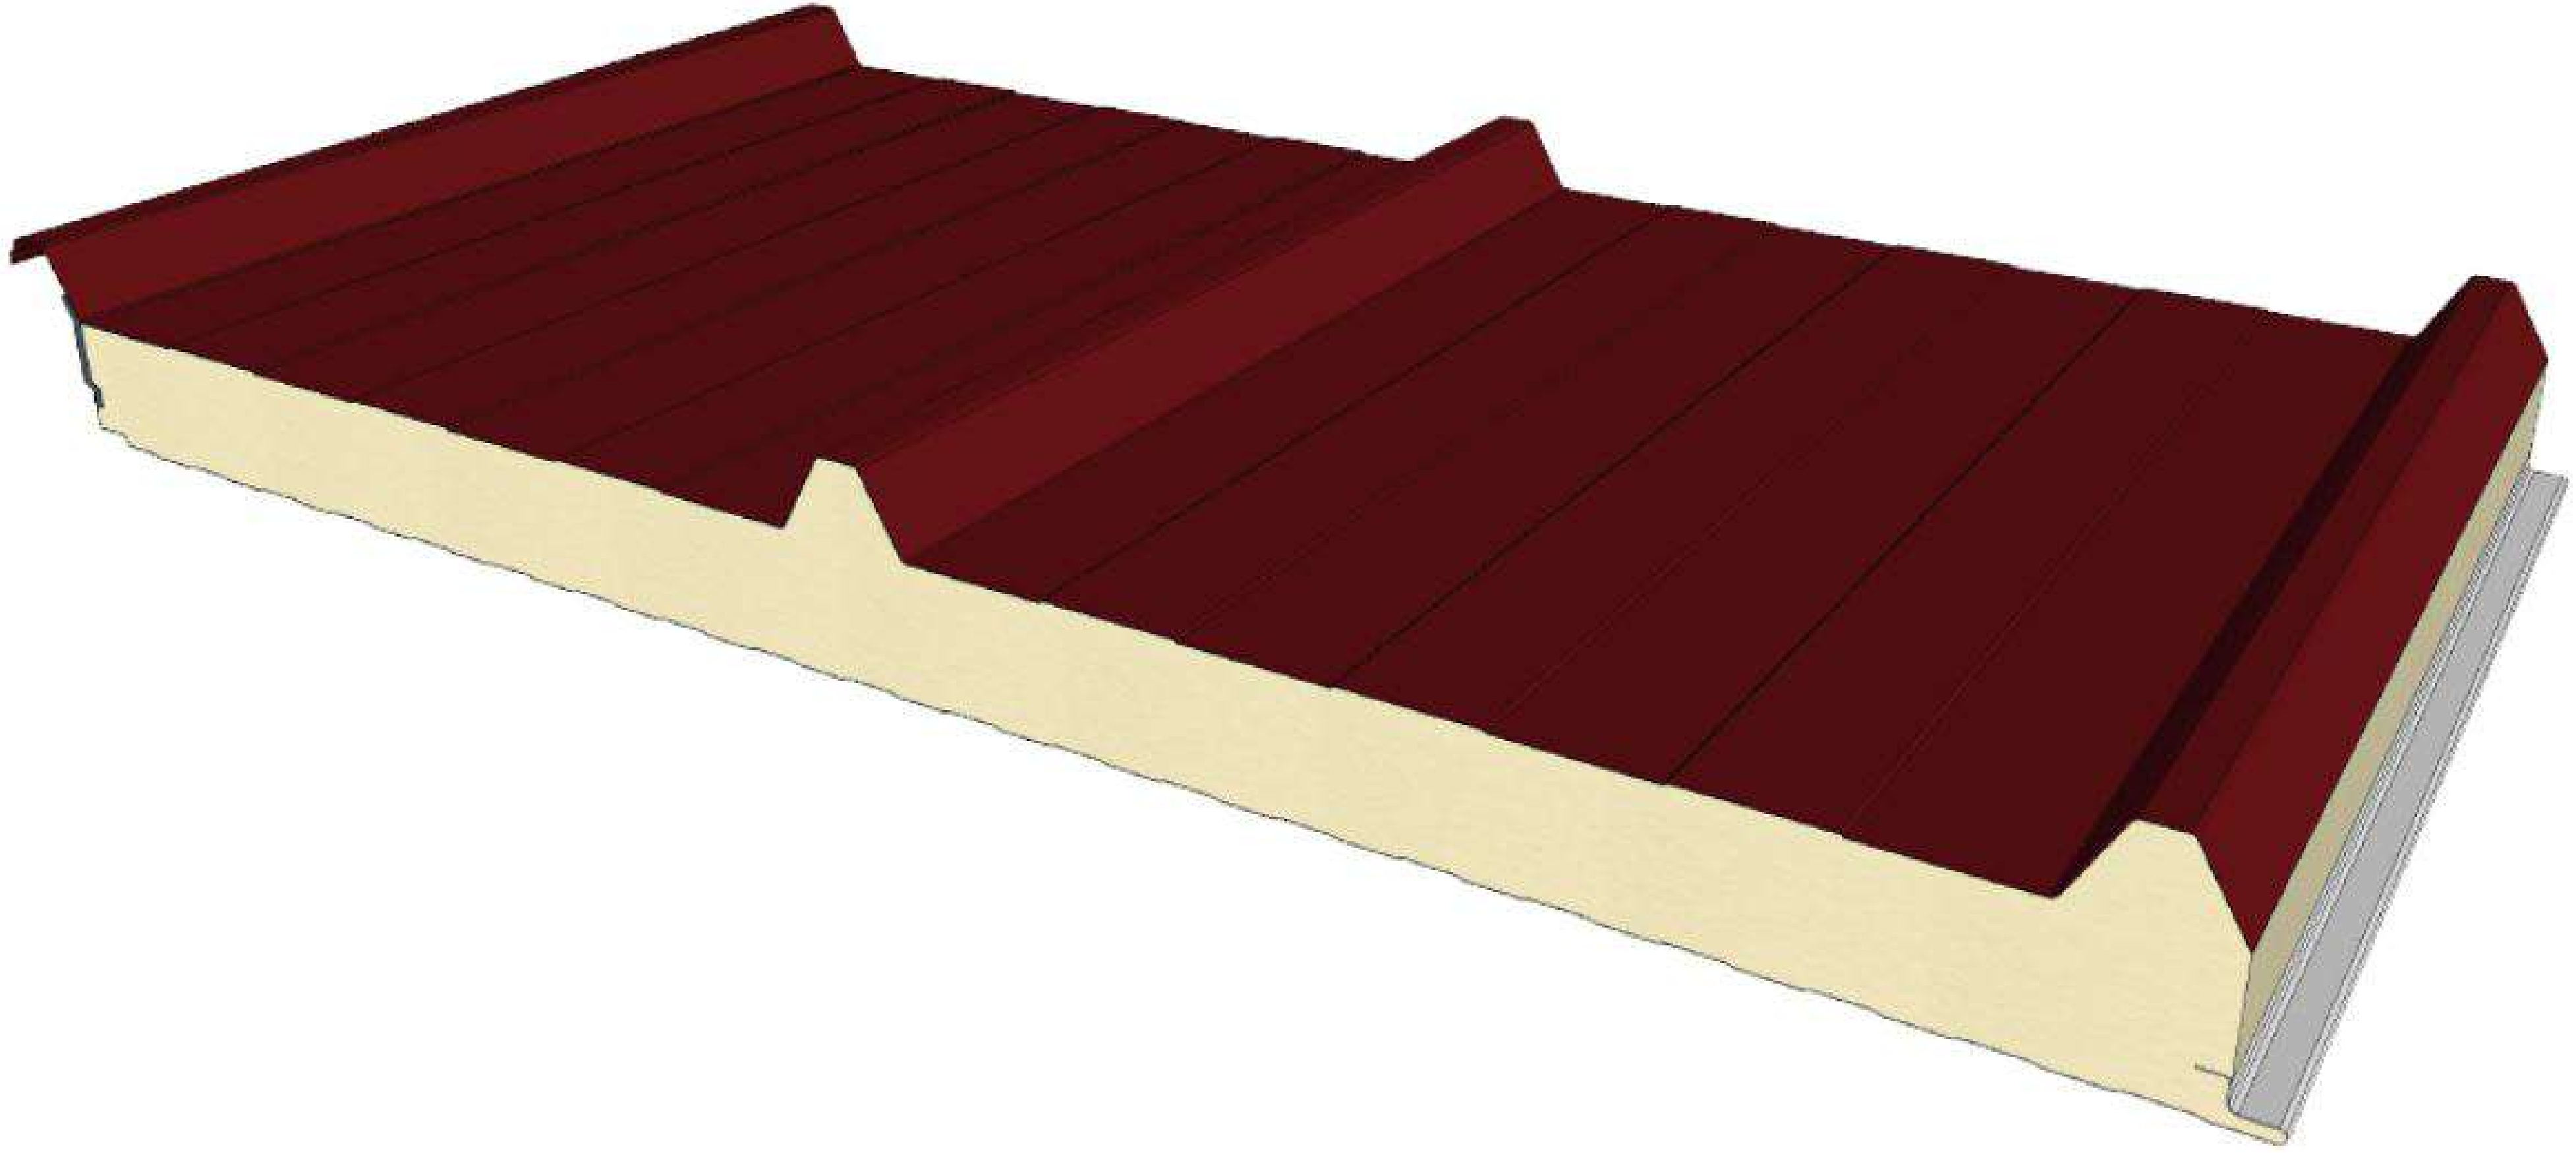

AVAILABILITY (IN OPTION) OF VARIOUS COLORS. CONSULT OUR COMMERCIAL



dippanel

CONTACTO:

- (+34) 954 436 422
- (+34) 675 534 289
- info@dippanel.com

Avd. Dólmenes de Valencina, 6
41907. Valencina de la Concepción.
Seville. Spain