



**SANDWICH
PANEL
COVERED WITH
FLASHING**

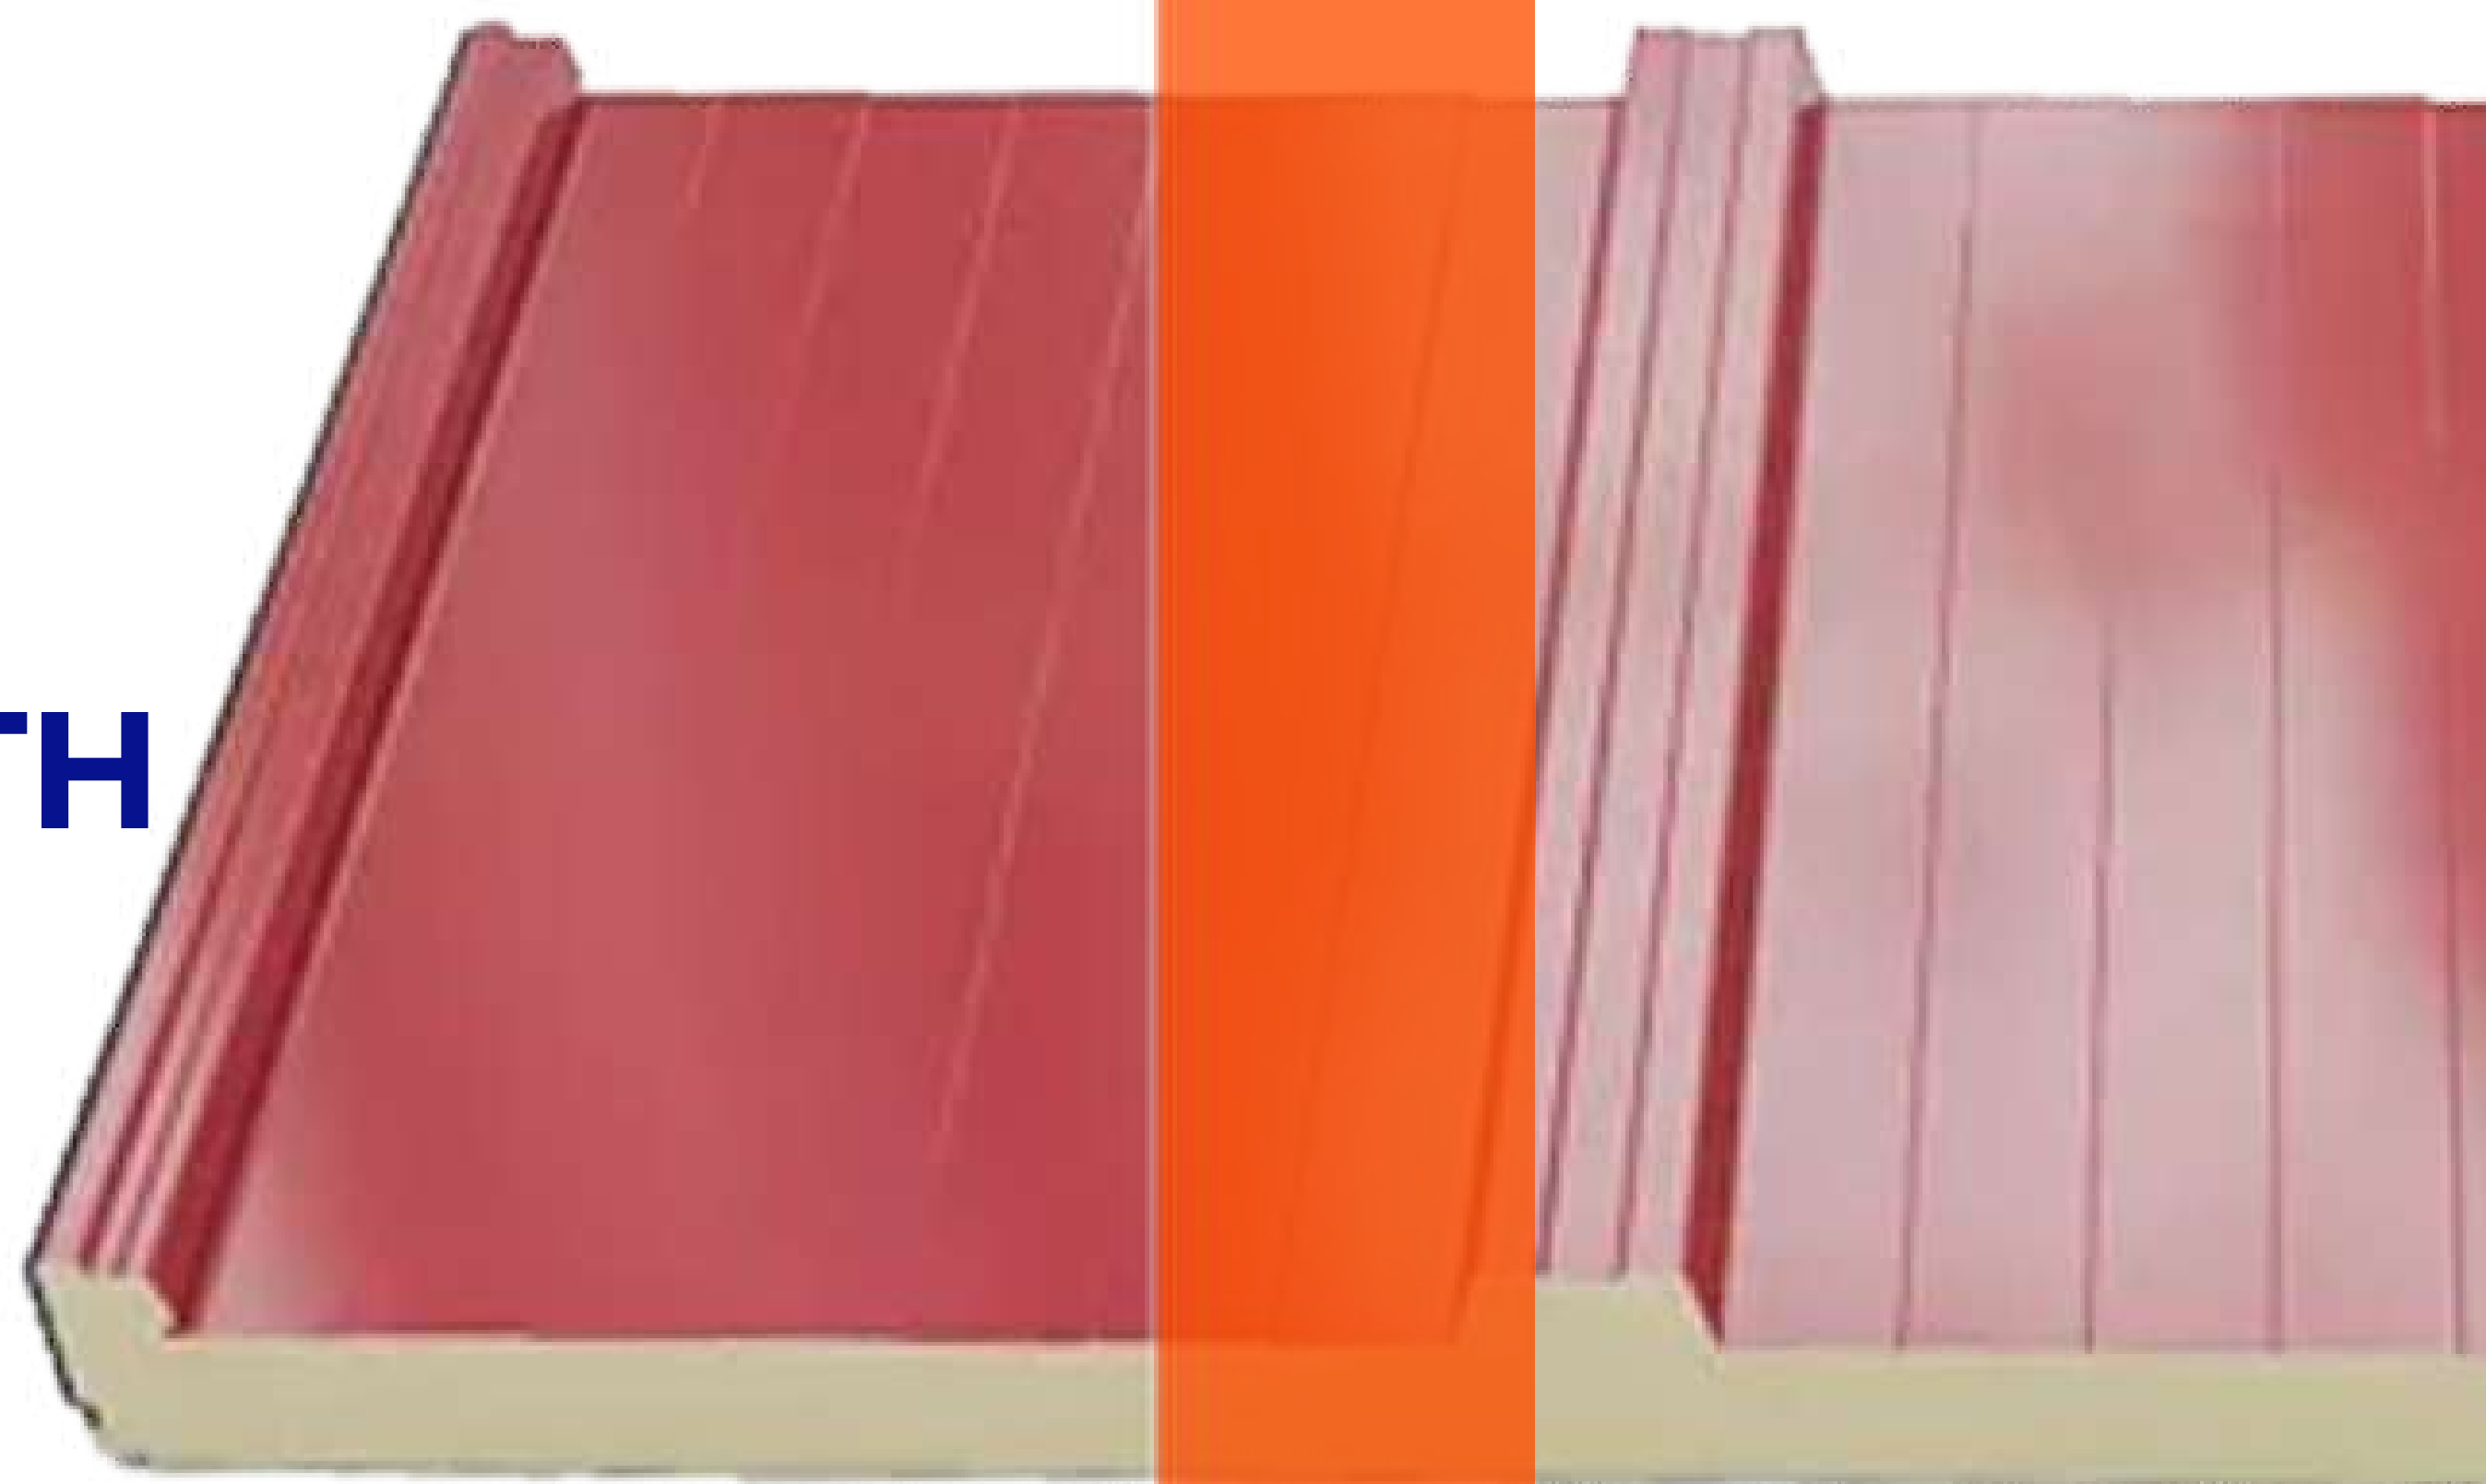


-
- Easy assembly and installation
 - Flashing model improves deck finish
 - PIR-E (B-s2-d0) and PIR (B-s1-d0)

Sandwich Panel Cover with Flashing


Thanks to the design of this panel, it becomes the perfect solution for roofs of industrial buildings such as warehouses, factories or logistics centers. Its finish with flashing provides a modern image to the roofs where it is installed as well as giving a degree of energy efficiency to the installation due to the thermal insulation of the panel.



Thermal isolation

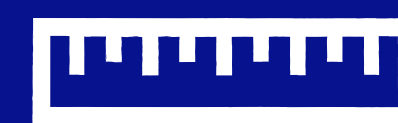

Various sizes and thicknesses available



Easy assembly and maintenance

Description

- Self-supporting roofing panels with flashing are made up of a steel sheet on each face and a core of rigid polyurethane foam (PIR-E - B-s2-d0) or Polyisocyanurate (PIR - B-s1-d0). They are designed as an enclosure for sloping roofs with a minimum slope of 3% on non-overlapping roofs and 6% on overlapping roofs.
- The maximum recommended length for this panel is 18,500mm with a useful width of 1,000mm

DIPPANEL Sandwich Panels stand out for:


- **Quality of finishes**
- **Easy assembly and installation**
- **Adaptability to customer needs**

Technical characteristics


PANEL SANDWICH CUBIERTA

ESPESOR (mm)	PESO (kg/m ²)	TRANSMITANCIA U (W/m ² k)	LUZ ADMISIBLE L(m)							LUZ ADMISIBLE L(m)						
			SOBRECARGA P (daN/m ²)							SOBRECARGA P (daN/m ²)						
	0,4+0,4 (mm)		60	80	100	120	150	200	250	60	80	100	120	150	200	250
30	6,78	0,74	2,97	2,60	2,34	2,15	1,93	1,69	1,51	2,52	2,20	1,98	1,82	1,64	1,42	1,28
40	7,18	0,57	3,24	2,84	2,56	2,35	2,12	1,85	1,66	2,95	2,59	2,33	2,14	1,92	1,67	1,50
50	7,58	0,46	3,51	3,08	2,78	2,55	2,30	2,00	1,80	3,37	2,96	2,67	2,45	2,20	1,91	1,72
60	7,99	0,38	3,76	3,31	2,98	2,74	2,47	2,15	1,94	3,77	3,31	2,98	2,74	2,46	2,14	1,92
80	8,79	0,29	4,23	3,72	3,36	3,09	2,79	2,43	2,19	4,50	3,95	3,56	3,27	2,95	2,57	2,31
100	9,6	0,24	4,66	4,10	3,71	3,41	3,08	2,69	2,42	5,15	4,53	4,09	3,76	3,39	2,95	2,65
	0,5+0,5 (mm)		60	80	100	120	150	200	250	60	80	100	120	150	200	250
30	7,66	0,74	3,31	2,90	2,62	2,40	2,16	1,88	1,69	3,32	3,04	2,83	2,67	2,49	2,18	1,95
40	8,07	0,57	3,59	3,15	2,84	2,61	2,35	2,05	1,84	3,79	3,47	3,24	3,05	2,84	2,56	2,30
50	8,47	0,46	3,87	3,40	3,07	2,82	2,54	2,22	1,99	4,24	3,89	3,63	3,42	3,18	2,90	2,63
60	8,87	0,39	4,14	3,64	3,29	3,02	2,72	2,38	2,14	4,68	4,29	4,00	3,78	3,51	3,20	2,95
80	9,68	0,29	4,65	4,09	3,70	3,40	3,07	2,68	2,41	5,50	5,04	4,71	4,44	4,13	3,76	3,46
100	10,48	0,24	5,11	4,50	4,07	3,75	3,38	2,96	2,67	6,26	5,74	5,36	5,06	4,71	4,25	3,81

- Profile and panel section

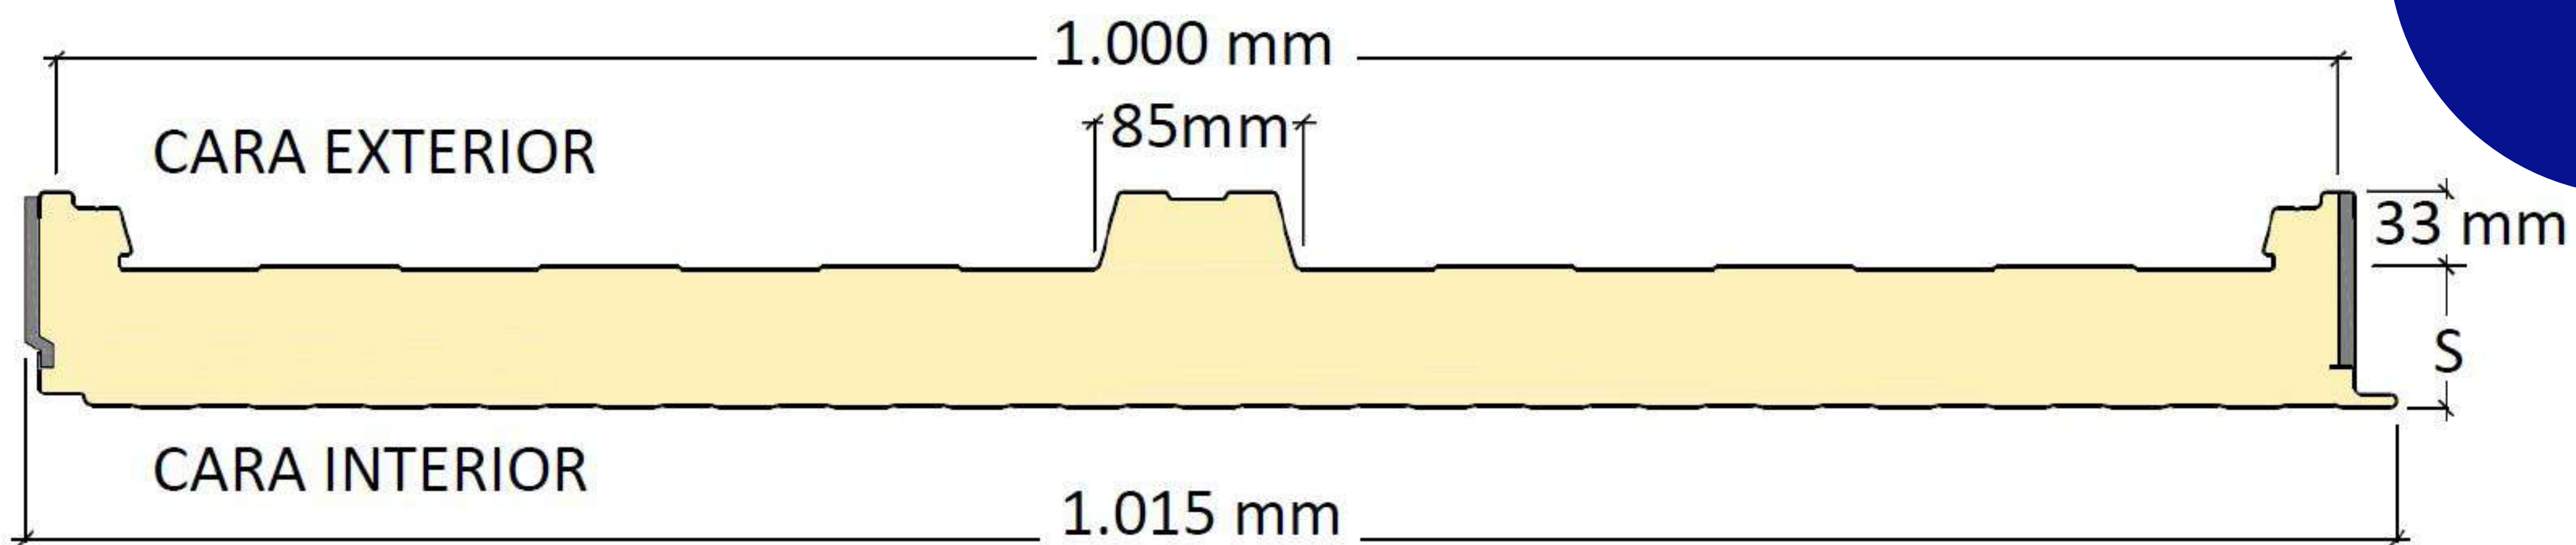


Useful width
1.000mm

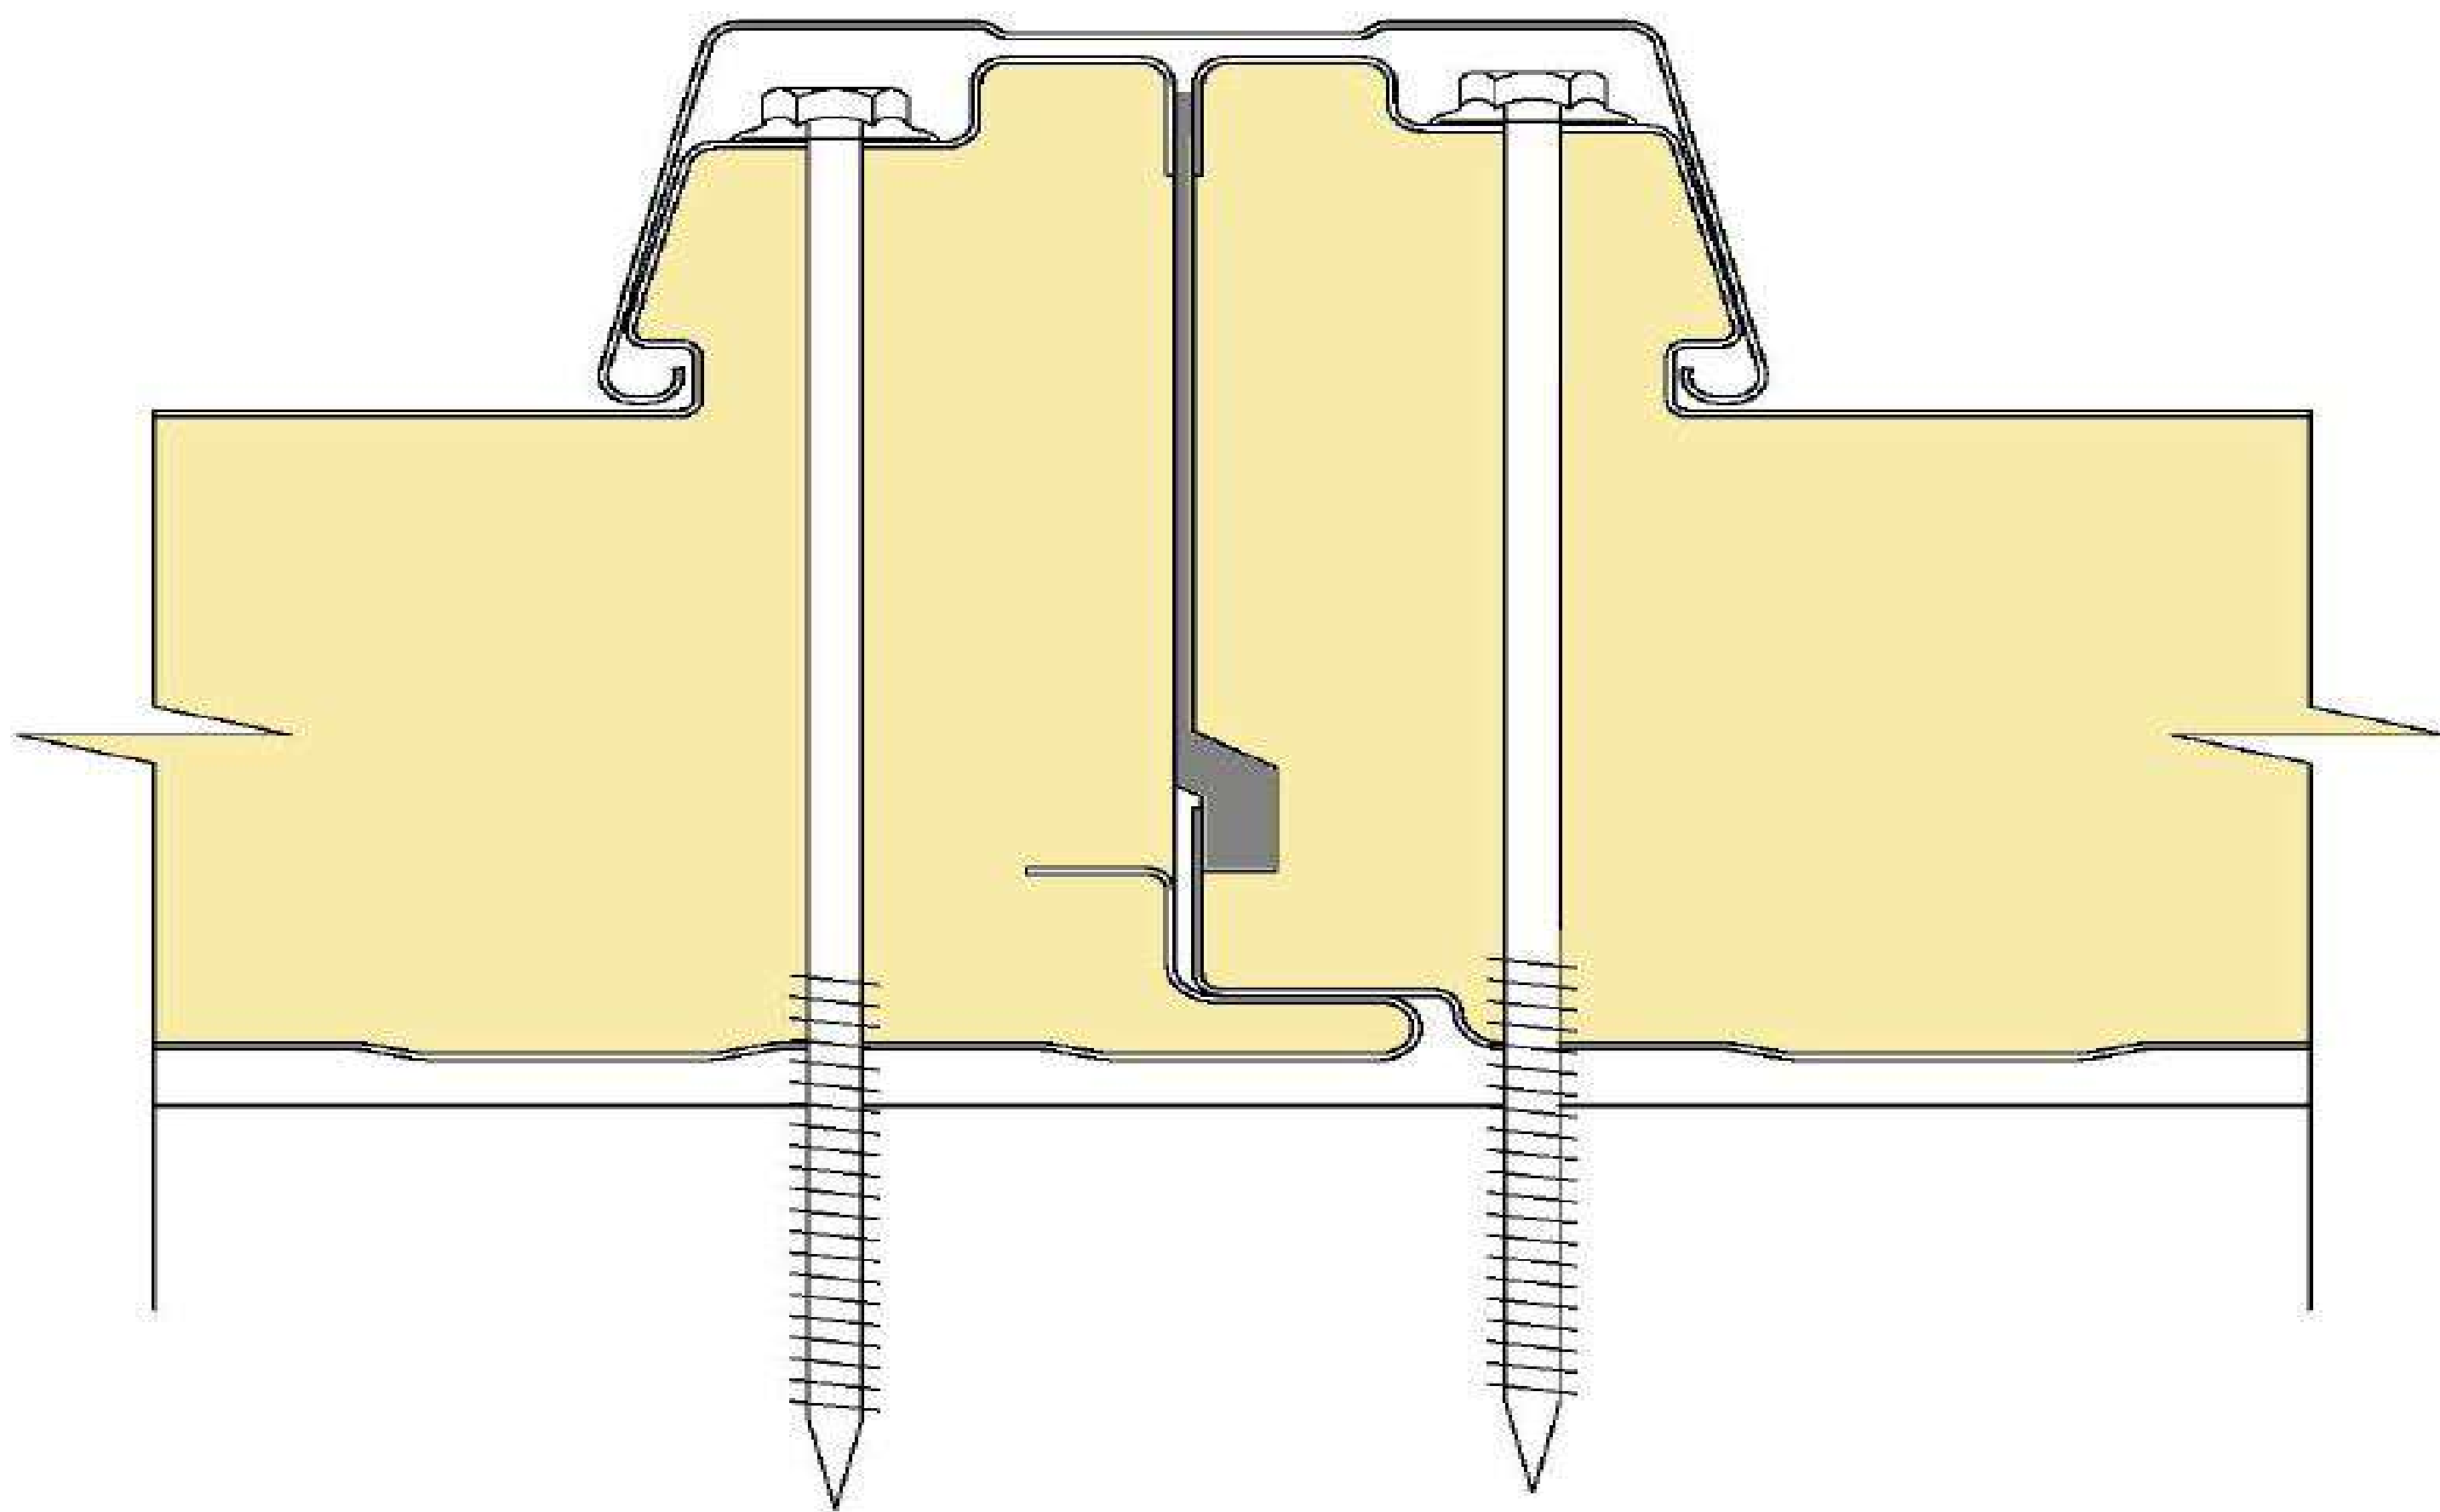

Technical characteristics

- Visual detail of panel and flashing

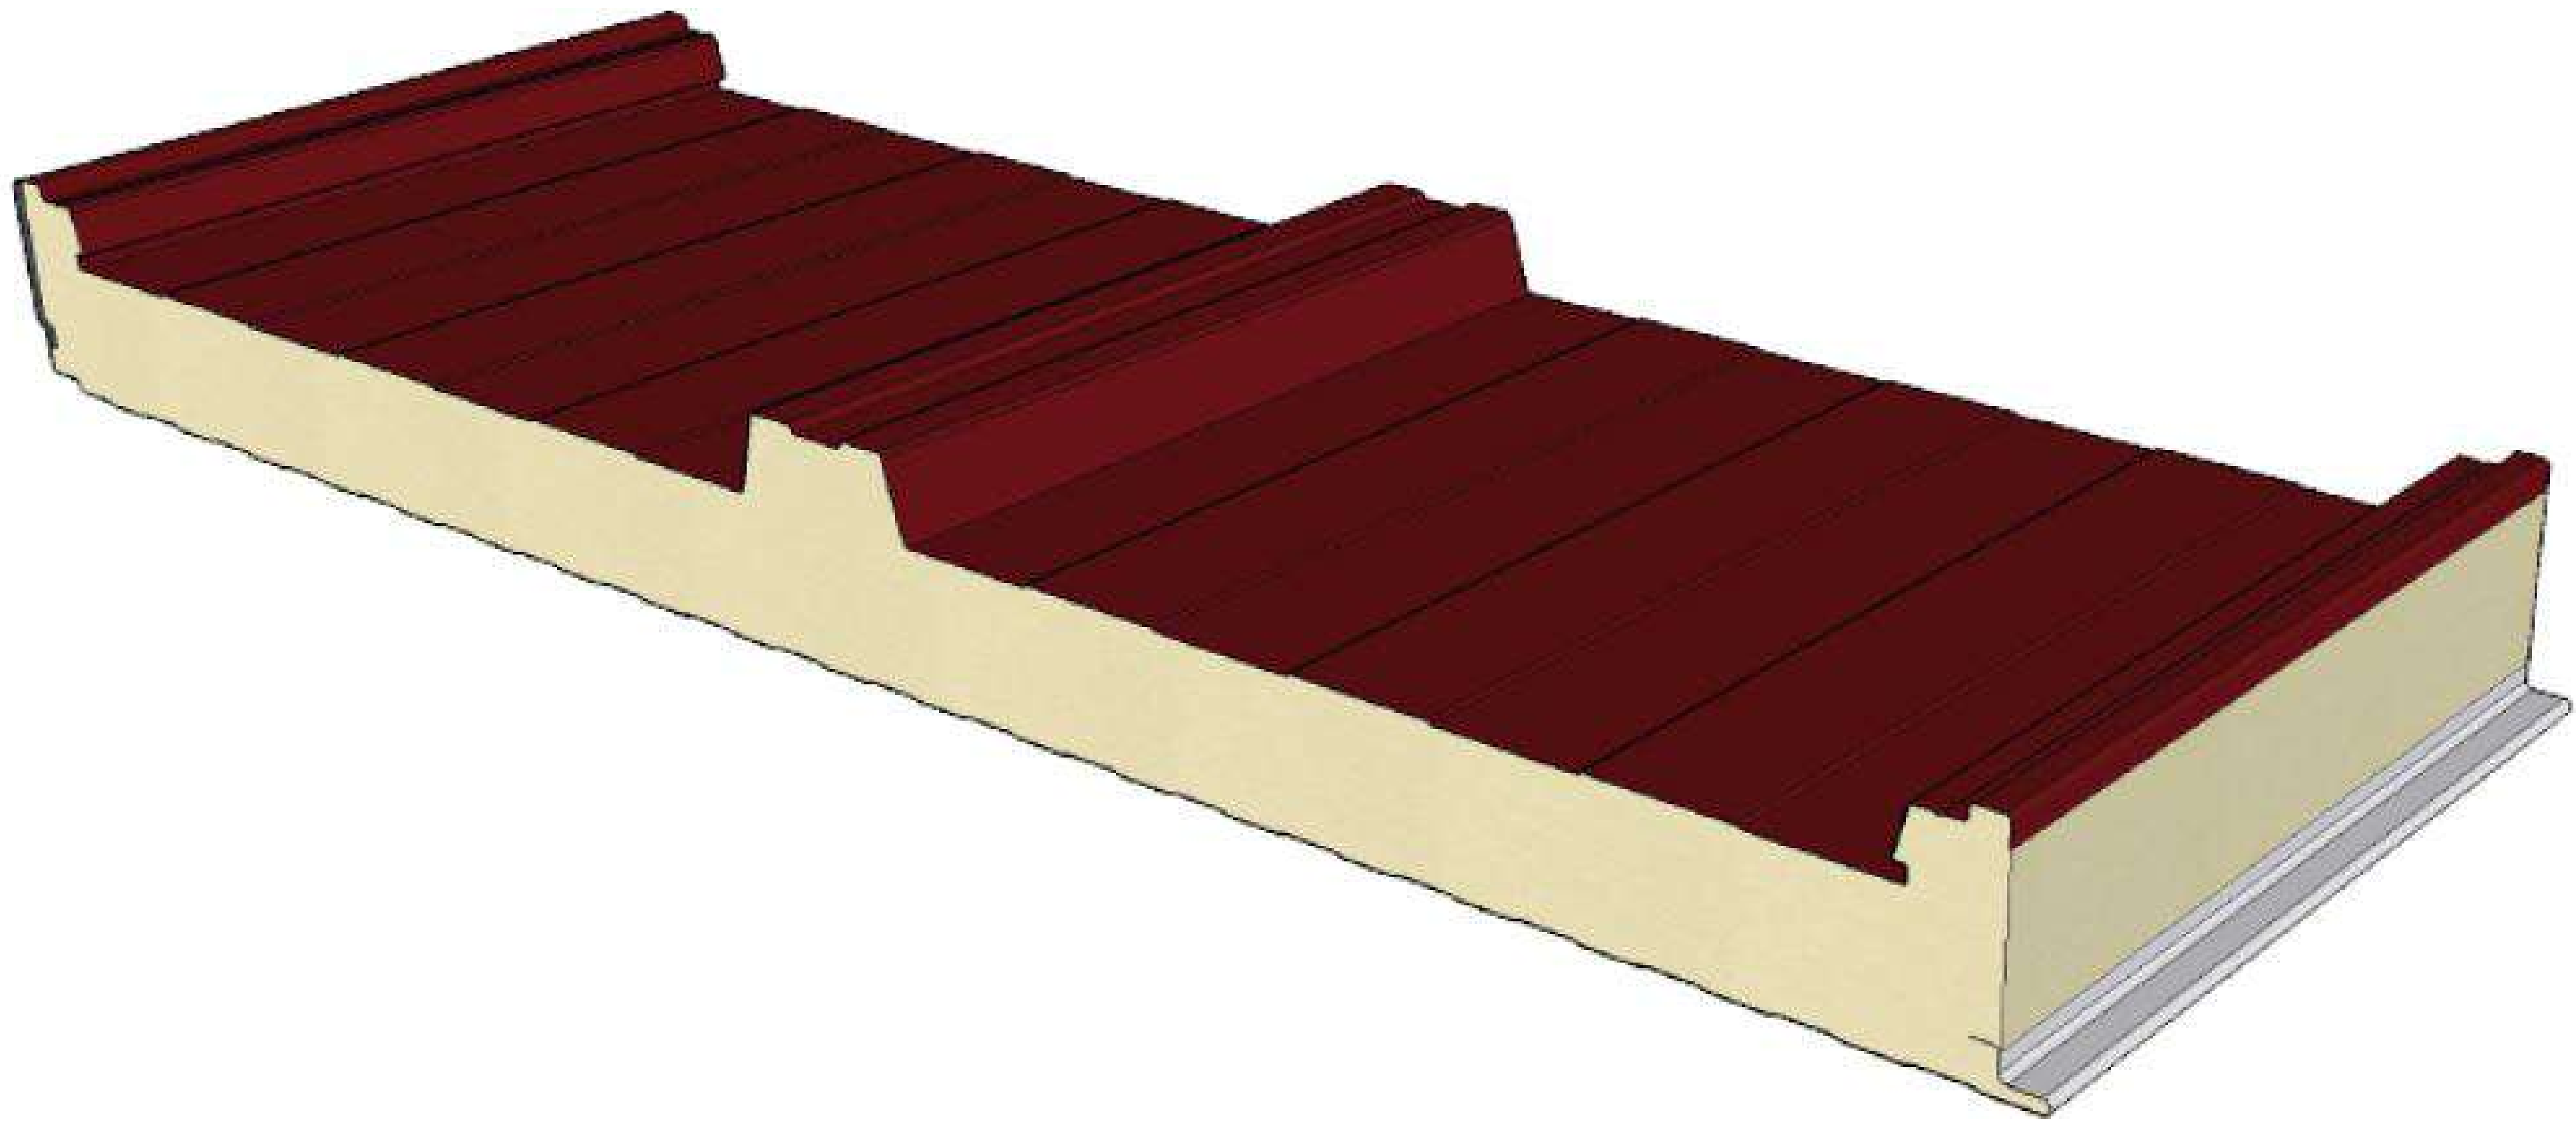

AVAILABILITY (IN OPTION) OF VARIOUS COLORS. CONSULT OUR COMMERCIAL



dippanel

CONTACTO:

- (+34) 954 436 422
- (+34) 675 534 289
- info@dippanel.com

Avd. Dólmenes de Valencina, 6
41907. Valencina de la Concepción.
Sevilla. España